

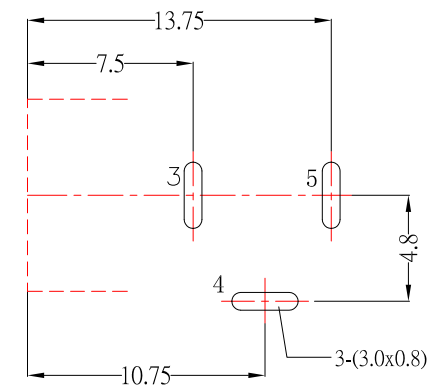
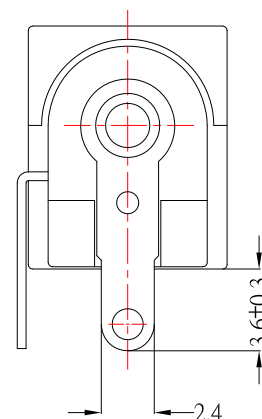
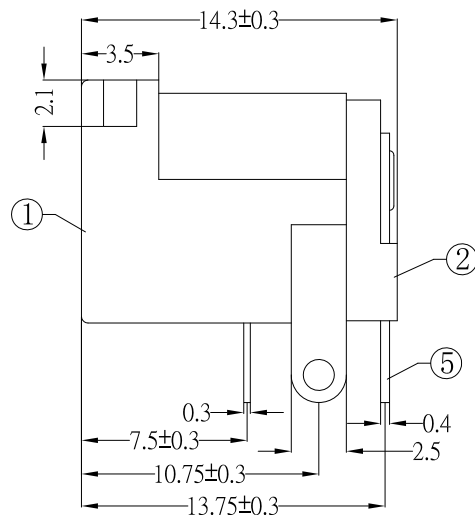
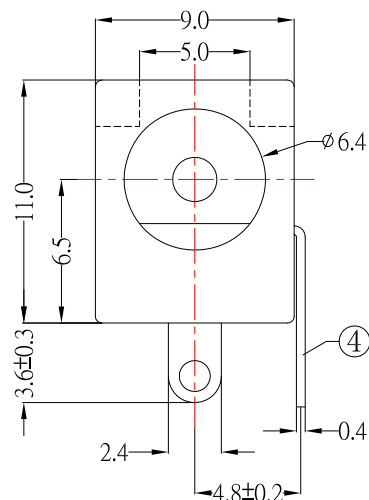


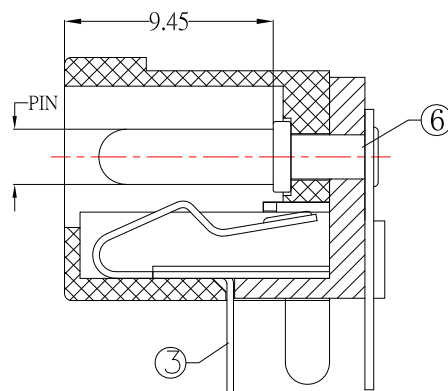

P.C.B LAYOUT
TOP VIEW

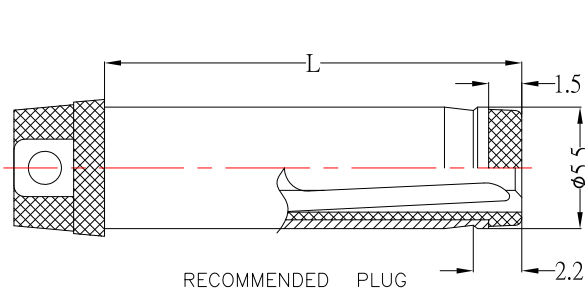

MODEL NO.	DC-002H-1-x-S124
SCHEMATIC	
CENTER PIN	Ø2.0 mm Ø2.5 mm

SPECIFICATION

- Rating : DC 12V , 6.0A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles

⑥	PIN	1	BRASS	Ni-Plating
⑤	CURVE PIECE	1	BRASS	Sn-Plating
④	FLAT PIECE	1	BRASS	Sn-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
②	COVER	1	LCP	
①	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	04/06/21			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK DIP TYPE
Jacky Chen	04/06/21			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-002H-1-x-S124
Tony Kao	04/06/21	1 : 1		
		SHEET NO.	PART NO.	DC-002H-1-x-S124
		1 of 1		
			SIZE	A4
			VER	R3