

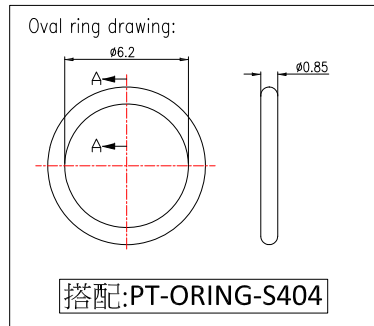
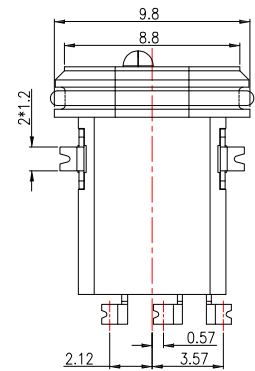


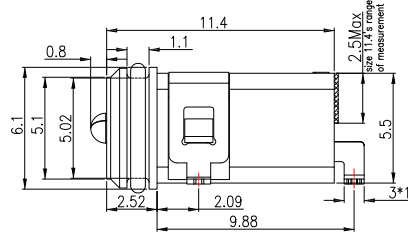

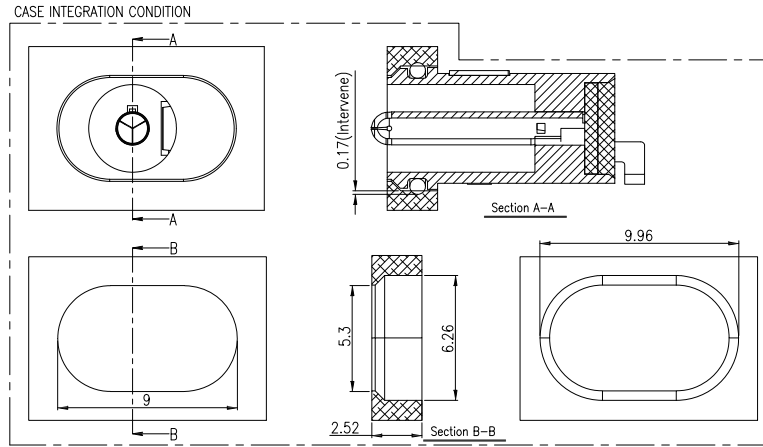


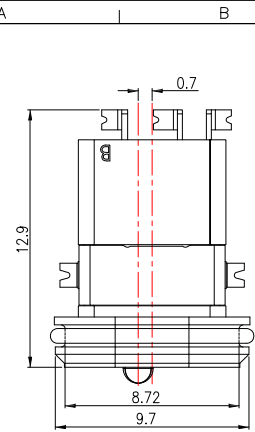


IPX8

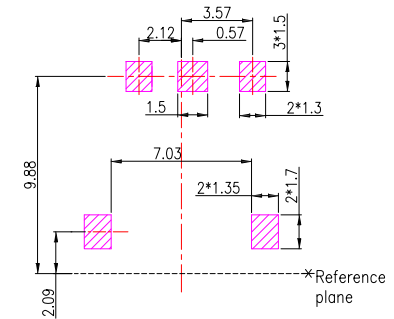

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- Rating : DC 30V , 1.0A
- Contact resistance : $\leq 30m\Omega$
- Insulation resistance : $\geq 100M\Omega$
- Withstand voltage : 300VAC
- Insertion and extraction force : 5-25N
- life test : 5,000 cycles



□ : TERMINAL NO. ○ : ITEM NO.

⑧	O-Ring	1		
⑦	Bond	1		
⑥	Shell	1	Brass	Ni plating
⑤	Tip Spring	1	Ti-Cu	Ni plating
④	Shunt	1	Brass	Ni plating
③	Center pin	1	Brass	Ni plating
②	Cap	1	LCP	Black
①	Housing	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/05/20			
CHECKED BY:	DATE	FINISH	MODLE	防水 DC JACK
Jacky Chen	11/05/20			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-WPS67A-1.65-S404
Tony Kao	11/05/20	1 : 1		
		SHEET NO.	PART NO.	DC-WPS67A-1.65-S404
		1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE