




SBC-160S6-20x-S412

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

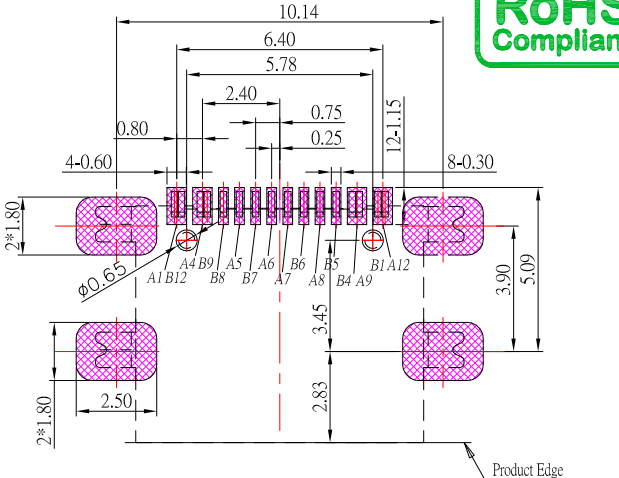

P.C.B LAYOUT

SPECIFICATIONS

Electrical:






- 1.Rating: 5.0A
- 1.Contact Resistance: 40 mΩ Max
- 2.Insulation Resistance: 100 MΩ Min
- 3.Dielectric Withstanding Voltage: 150V AC

Material:

- 1.Housing: LCP
- 2.Contact: C7025
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

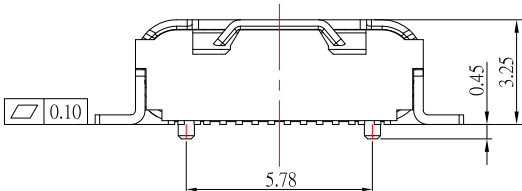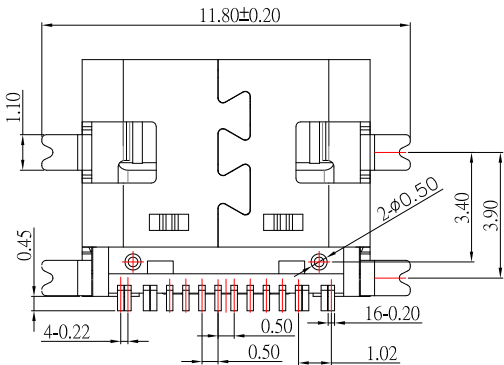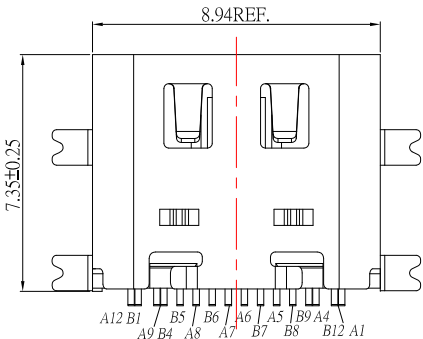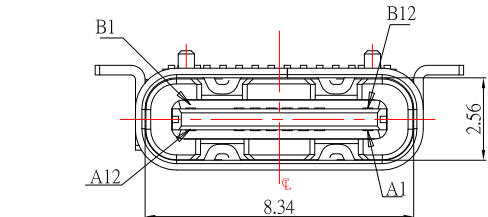

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	更新尺寸	Jack	042924
5	新增PIN定義	Jack	022023
4	更新圖面	Jack	081122
3	更新樣式	Jack	011221
2	更新圖面	Jack	010621
1	更新及新增尺寸	Jack	110520
ITEM NO.	DESCRIPTION	DRAWN	DATE



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	04/29/24	FINISH	MODLE	TYPE CF TYPE CF 16P 全貼有柱有彈
CHECKED BY:	DATE	SCALE	DWG NO.	SBC-160S6-20x-S412
Jacky Chen	04/29/24	SHEET NO.	PART NO.	SBC-160S6-20x-S412
APPROVED BY:	DATE			
Tony Kao	04/29/24			