

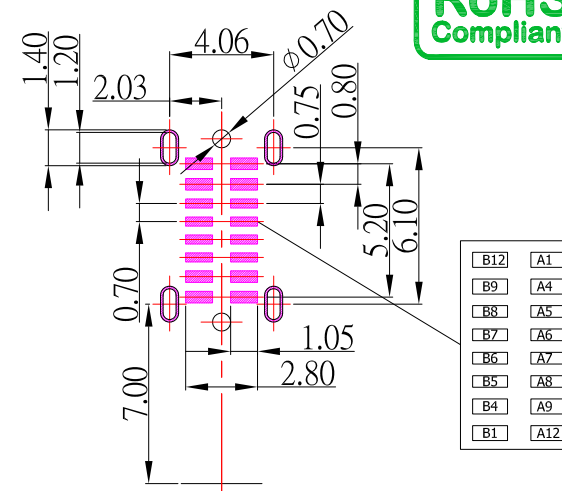


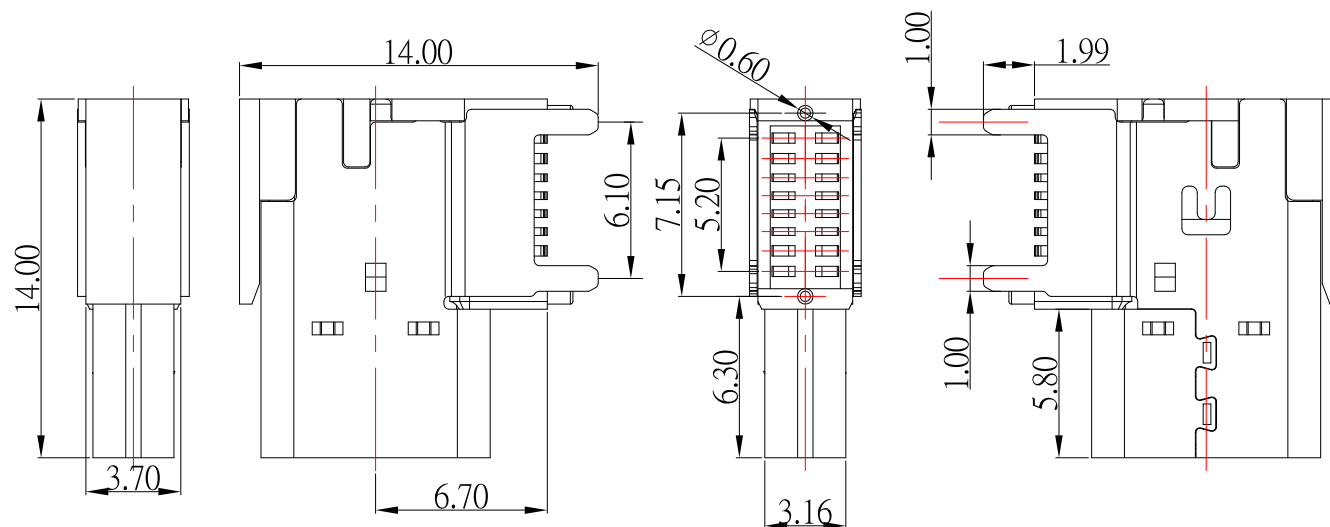

SBC-160P4-20x-S410

— 鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

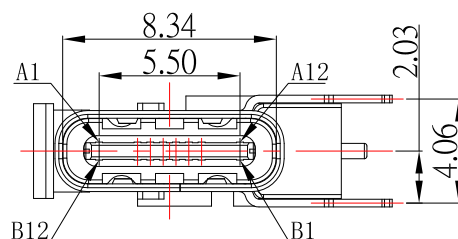

<i>A1</i>	<i>GND</i>	<i>B12</i>	<i>GND</i>
<i>A2</i>		<i>B11</i>	
<i>A3</i>		<i>B10</i>	
<i>A4</i>	<i>VBUS</i>	<i>B9</i>	<i>VBUS</i>
<i>A5</i>	<i>CC1</i>	<i>B8</i>	<i>SBU2</i>
<i>A6</i>	<i>D+</i>	<i>B7</i>	<i>D-</i>
<i>A7</i>	<i>D-</i>	<i>B6</i>	<i>D+</i>
<i>A8</i>	<i>SBU1</i>	<i>B5</i>	<i>CC2</i>
<i>A9</i>	<i>VBUS</i>	<i>B4</i>	<i>VBUS</i>
<i>A10</i>		<i>B3</i>	
<i>A11</i>		<i>B2</i>	
<i>A12</i>	<i>GND</i>	<i>B1</i>	<i>GND</i>

SPECIFICATIONS

Electrical:

- 1.Rating: 3.0 A
- 2.Dielectric Withstand Voltage: 100V AC
- 3.Contact Resistance: 40 mΩ Max
- 4.Insulation Resistance: 100 MΩ Min

Mechanical:

- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP
- 2.Contact: C7025
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	05/19/22
CHECKED BY:	DATE
Jacky Chen	05/19/22
APPROVED BY:	DATE
Tony Kao	05/19/22

DATE _____

05/19/22

DATE _____

DATE
05/10/20

05/19/22

DATE _____

MAT'L
FINISH
SCALE
SHEET NO

	MATH
--	------

MATL

FINISH

FINISH

SCALE

TITLE	CONNECTOR		
MODLE	USB 3.1 侧插母座 16 PIN CH6.7		
DWG NO.	SBC-160P4-20x-S410		SIZE A4
PART NO.	SBC-160P4-20x-S410		VER B

TITLE	CONNECTOR
1. TITLE	1. TITLE
2. TITLE	2. TITLE
3. TITLE	3. TITLE
4. TITLE	4. TITLE
5. TITLE	5. TITLE
6. TITLE	6. TITLE
7. TITLE	7. TITLE
8. TITLE	8. TITLE
9. TITLE	9. TITLE
10. TITLE	10. TITLE
11. TITLE	11. TITLE
12. TITLE	12. TITLE
13. TITLE	13. TITLE
14. TITLE	14. TITLE
15. TITLE	15. TITLE
16. TITLE	16. TITLE
17. TITLE	17. TITLE
18. TITLE	18. TITLE
19. TITLE	19. TITLE
20. TITLE	20. TITLE
21. TITLE	21. TITLE
22. TITLE	22. TITLE
23. TITLE	23. TITLE
24. TITLE	24. TITLE
25. TITLE	25. TITLE
26. TITLE	26. TITLE
27. TITLE	27. TITLE
28. TITLE	28. TITLE
29. TITLE	29. TITLE
30. TITLE	30. TITLE
31. TITLE	31. TITLE
32. TITLE	32. TITLE
33. TITLE	33. TITLE
34. TITLE	34. TITLE
35. TITLE	35. TITLE
36. TITLE	36. TITLE
37. TITLE	37. TITLE
38. TITLE	38. TITLE
39. TITLE	39. TITLE
40. TITLE	40. TITLE
41. TITLE	41. TITLE
42. TITLE	42. TITLE
43. TITLE	43. TITLE
44. TITLE	44. TITLE
45. TITLE	45. TITLE
46. TITLE	46. TITLE
47. TITLE	47. TITLE
48. TITLE	48. TITLE
49. TITLE	49. TITLE
50. TITLE	50. TITLE
51. TITLE	51. TITLE
52. TITLE	52. TITLE
53. TITLE	53. TITLE
54. TITLE	54. TITLE
55. TITLE	55. TITLE
56. TITLE	56. TITLE
57. TITLE	57. TITLE
58. TITLE	58. TITLE
59. TITLE	59. TITLE
60. TITLE	60. TITLE
61. TITLE	61. TITLE
62. TITLE	62. TITLE
63. TITLE	63. TITLE
64. TITLE	64. TITLE
65. TITLE	65. TITLE
66. TITLE	66. TITLE
67. TITLE	67. TITLE
68. TITLE	68. TITLE
69. TITLE	69. TITLE
70. TITLE	70. TITLE
71. TITLE	71. TITLE
72. TITLE	72. TITLE
73. TITLE	73. TITLE
74. TITLE	74. TITLE
75. TITLE	75. TITLE
76. TITLE	76. TITLE
77. TITLE	77. TITLE
78. TITLE	78. TITLE
79. TITLE	79. TITLE
80. TITLE	80. TITLE
81. TITLE	81. TITLE
82. TITLE	82. TITLE
83. TITLE	83. TITLE
84. TITLE	84. TITLE
85. TITLE	85. TITLE
86. TITLE	86. TITLE
87. TITLE	87. TITLE
88. TITLE	88. TITLE
89. TITLE	89. TITLE
90. TITLE	90. TITLE
91. TITLE	91. TITLE
92. TITLE	92. TITLE
93. TITLE	93. TITLE
94. TITLE	94. TITLE
95. TITLE	95. TITLE
96. TITLE	96. TITLE
97. TITLE	97. TITLE
98. TITLE	98. TITLE
99. TITLE	99. TITLE
100. TITLE	100. TITLE

TITLE	CONNECTOR
-------	-----------

MODEL	USB 3.1 侧插母座 16 PIN CH67
-------	--------------------------

MODLE	USB 3.1 侧插母座 16 PIN CH6.7	
-------	---------------------------	--

DWG NO.	SBC-160P4-20x-S410	SIZE
		A

		A4
		VER

	SIZE
--	------

	A4
--	----

VER
