









MRUSB-5B-D13xx-S347


Shell Material : SHELL鍍層:

Blank : BRASS
A : SUS

TN
NI

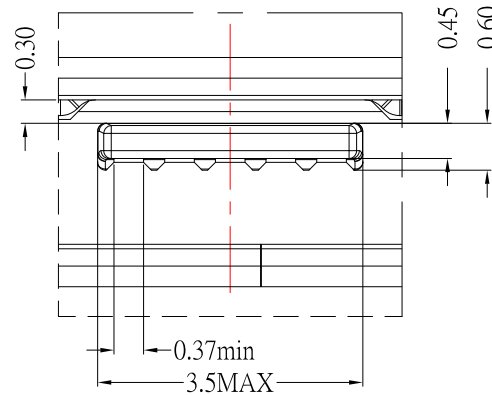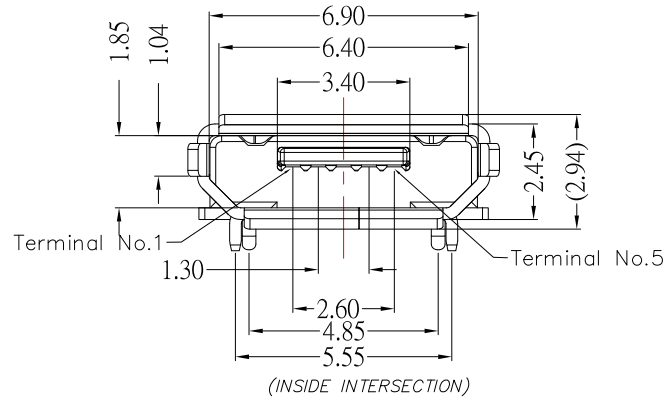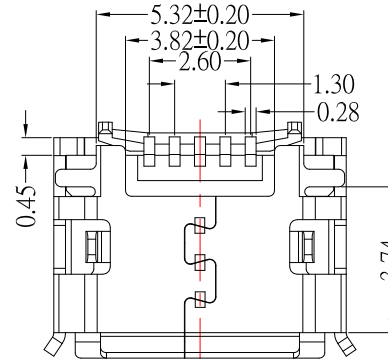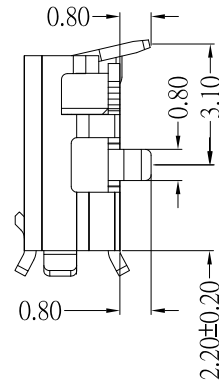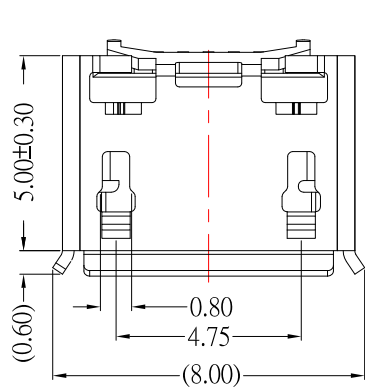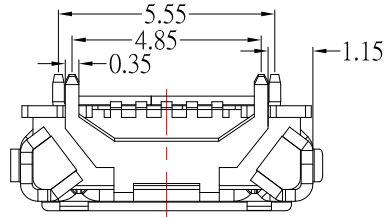

CONTACT AREA DETAIL VIEW

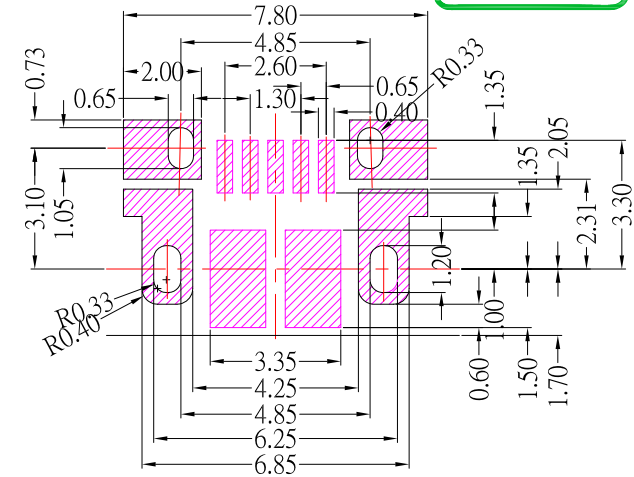

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

1.MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: BRASS / SUS

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls ;

Nickel under plated overall

2.2 SHELL: NICKEL or TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 CURRENT RATING: 1.0 A Max

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V(ac) FOR 1min

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.

3.5 TOTAL MATING FORCE: 3.57 KgF MAX.

3.6 TOTAL UNMATING FORCE: 1.0 KgF MIN.

3.7 TEMPERATURE RANGE: -30°C ~ +80°C



TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

10/07/21

CHECKED BY:

Jacky Chen

DATE

10/07/21

APPROVED BY:

Tony Kao

DATE

10/07/21

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

MICRO USB 5P SMT 牛角型斜後蓋

PH:5.5-4.85mm

MRUSB-5B-D13xx-S347

MRUSB-5B-D13xx-S347

SIZE

A4

VER

R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新樣式	Jack	100721
2	新增外殼材質選項	Jack	010918
1	更新為A0版	Jack	102616