

IPX7



MRUSB-5B-WP19-x-S165


鍍層厚度:

Blank : 1u"

2 : 15u"

3 : 30u"

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

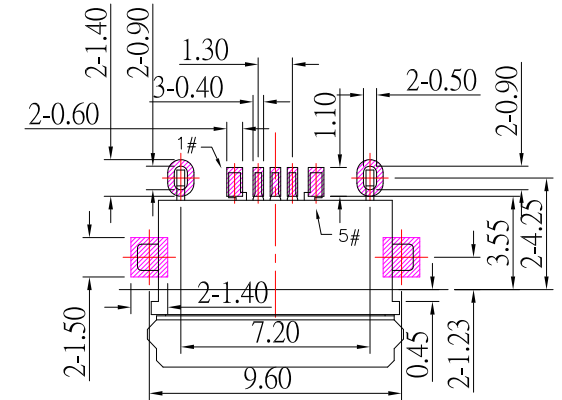

P.C.B LAYOUT MOUNTING PATTERN

NOTES:

MATERIAL:

1.1 HOUSING: PA9T

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: SUS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

GOLD PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER







3.SPECIFICATION:

3.1 RATING: 1.5A

3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 500 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 1000 MΩ MIN.

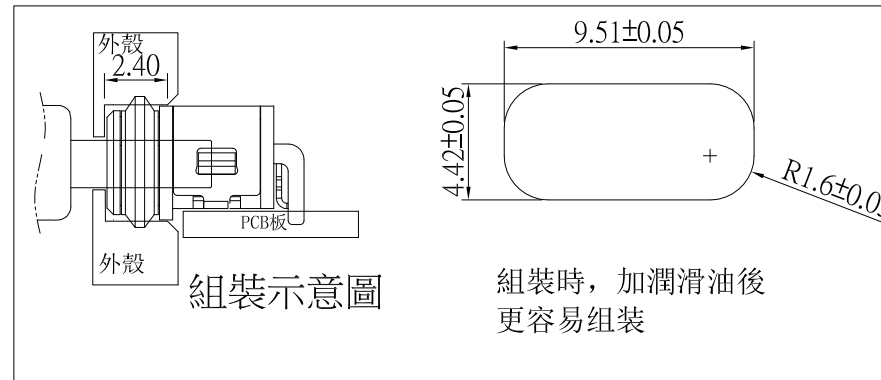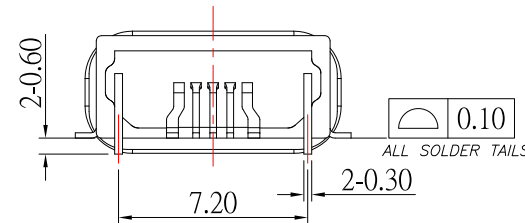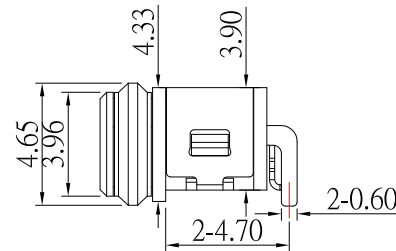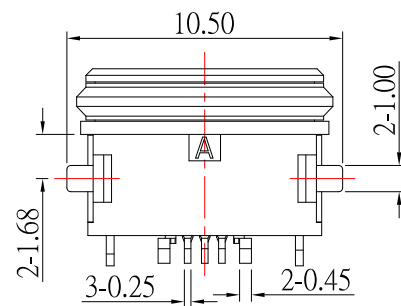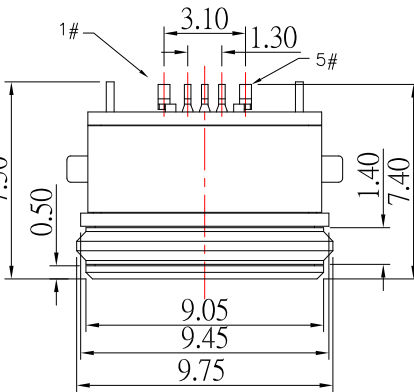

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/04/21
DATE: 11/04/21
DATE: 11/04/21

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	MICRO USB 5PF B TYPE H 3.9 防水型 IPX7
SCALE	DWG NO.	MRUSB-5B-WP19-x-S165
SHEET NO.	PART NO.	MRUSB-5B-WP19-x-S165

SIZE
A4
VER
R