
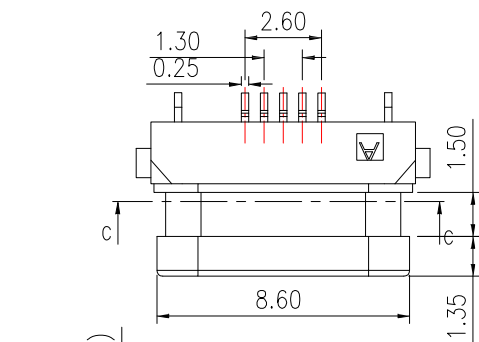
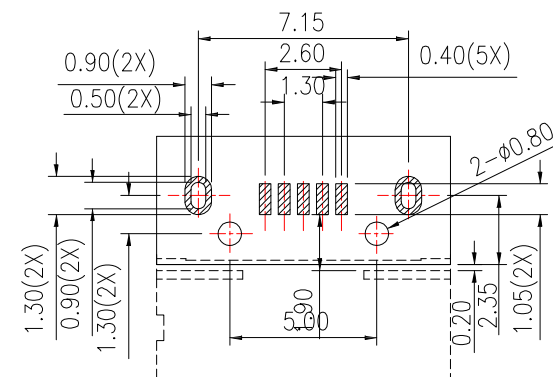
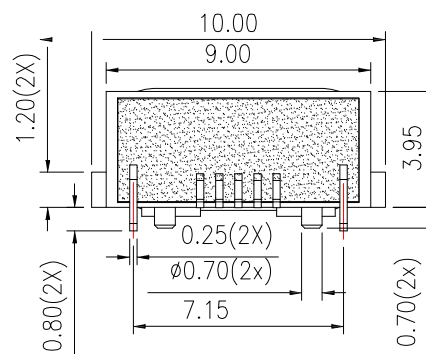
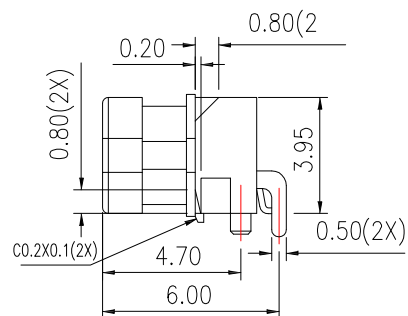


IPX7

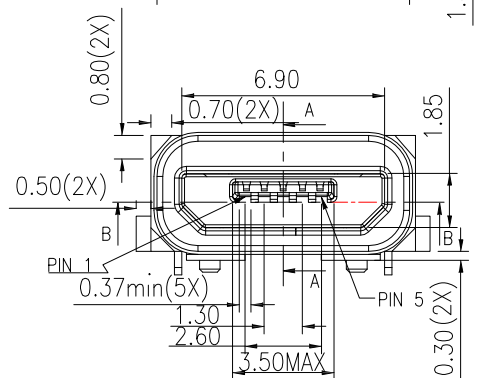

P.C.B LAYOUT MOUNTING PATTERN

MRUSB-5B-WP17-x-S404

└ 鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

NOTES:

MATERIAL:

1.1 HOUSING: PA9T

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: SUS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA :

TIN PLATED ON SOLDER BALLS :

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER



3.SPECIFICATION:

3.1 RATING: 1.8A(PIN1&5) , 0.5A(PIN2&3&4)

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 300 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 M Ω MIN.

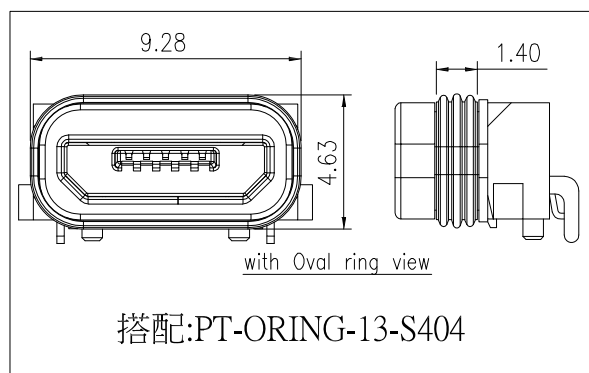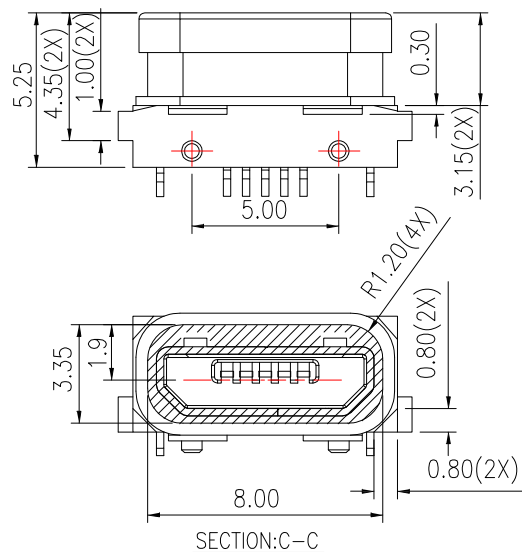

搭配:PT-ORING-13-S404



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	07/22/20

DATE _____

07/22/2

CHECKED BY:	DATE
-------------	------

DATE _____

APPROVED BY:	DATE:
Tony Kao	07/22/2011

DATE _____

07/22/2

MAT'L		TITLE	CONNECTOR	
FINISH		MODLE	MICRO USB 5PF B TYPE H 3.95 防水型 IPX7	
SCALE	1 : 1	DWG NO.	MRUSB-5B-WP17-x-S404	SIZE A4
SHEET NO.	1 of 2	PART NO.	MRUSB-5B-WP17-x-S404	VER R

	SIZE
	A4
	VER
	D