
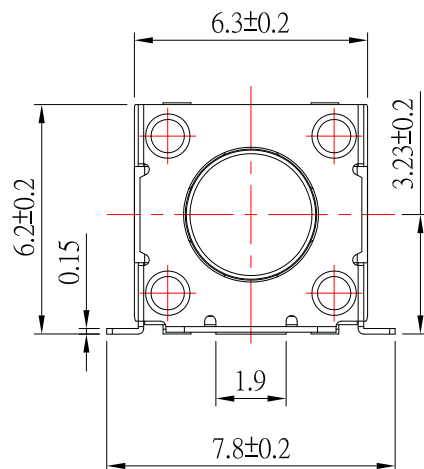


CIRCUIT DIAGRAM



MODEL NO.	TS-A58VS4	TS-A58VS4A	TS-A58VS4B
L (mm)	4.40	4.90	2.30
H (mm)	7.25	7.75	5.15

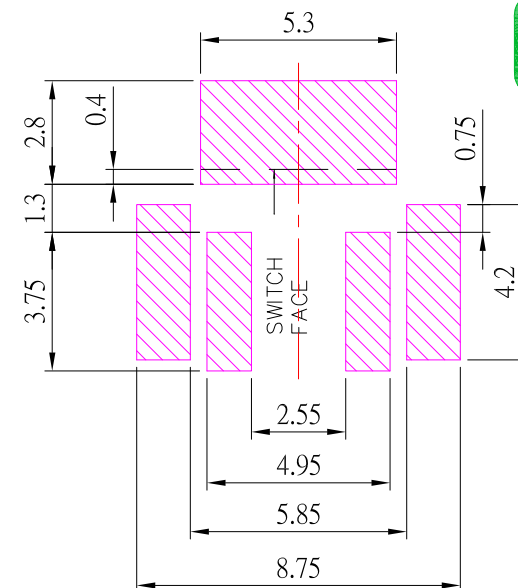

P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	030±0.10mm	
Operating Force	2 180± 50gf	3 250± 50gf
Operating Life (cycles)	200,000	100,000

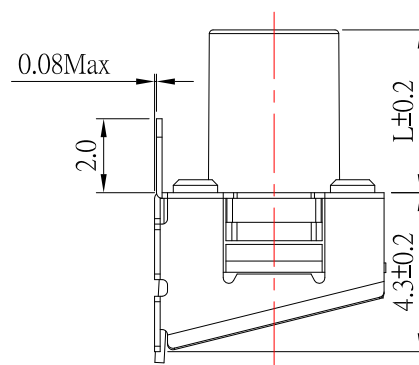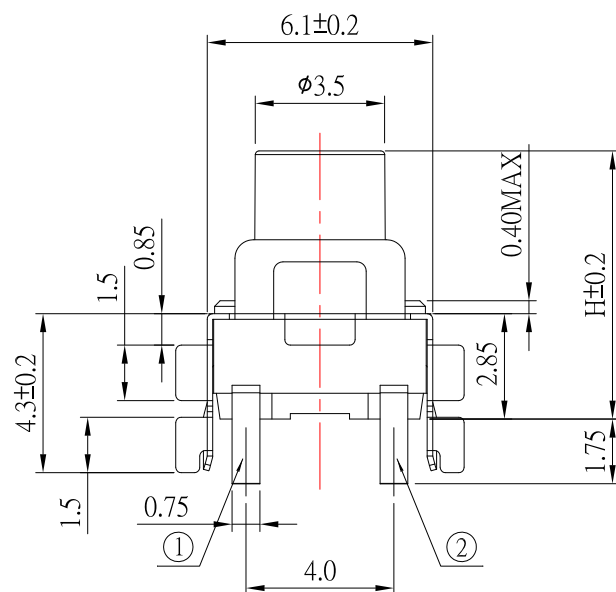

G	STEM	1	PPA	
F	COVER	1	SUS	Ag plated
E	PRESSURE PAD	1	PPA	
D	RUBBER PAD	1	SILICA GEL	
C	CONTACT	1	SUS	Ag plated
B	TERMINAL	2	H65	Ag plated
A	BASE	1	PA6T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
01/03/22
DATE
01/03/22
DATE
01/03/22

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A58VS4x-x-S138
TS-A58VS4x-x-S138

SIZE
A4
VER
R1