



TS-A09VS1x-3-S246

MODEL NO.	X(mm)
BLANK	3.8
A	4.3
B	4.8
C	5.0
E	7.0

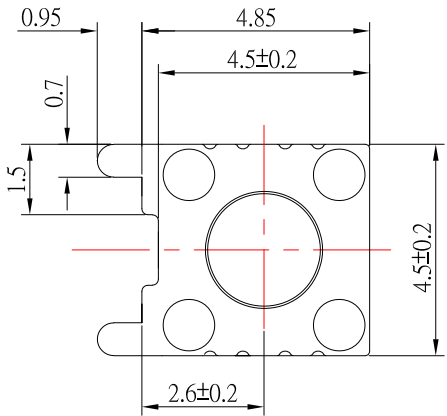



CIRCUIT DIAGRAM

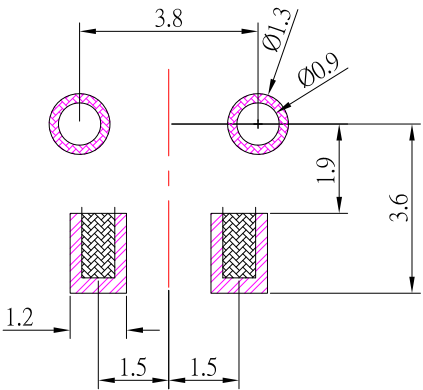

PCB LAYOUT

SPECIFICATIONS

Rating	DC 12V 0.05A.
Insulation Resistance	100 M Ω Min.
Contact Resistance	100 m Ω Max.
Operating Force	260 $\pm$ 50gf
Operating Life (cycles)	100,000
Travel	0.20 $\pm$ 0.10mm

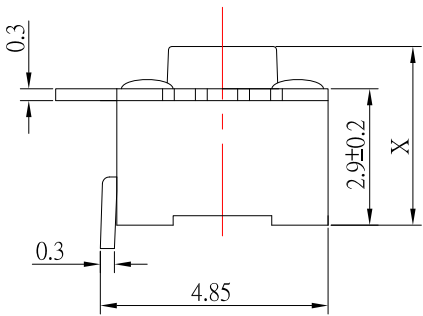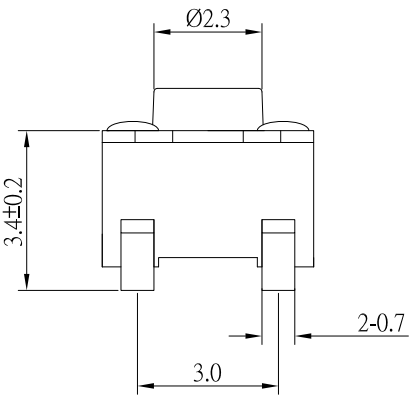

E	COVER	1	BRASS	Ag plated
D	STEM	1	PPA	Black
C	CONTACT	1	SUS	Ag plated
B	TERMINAL	2	BRASS	Ag plated
A	BASE	1	PA6T	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

07/16/24

MAT'L

CHECKED BY:

Jacky Chen

DATE

07/16/24

FINISH

APPROVED BY:

Tony Kao

DATE

07/16/24

SCALE

1 : 1

SHEET NO.

1 of 1

TITLE

SWITCH

MODLE

TACT SWITCH

DWG NO.

TS-A09VS1x-3-S246

PART NO.

TS-A09VS1x-3-S246

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------