

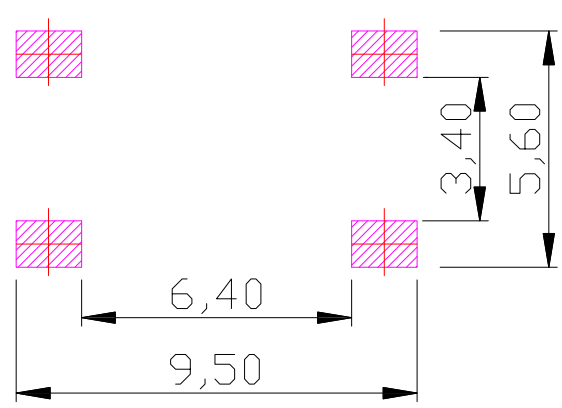
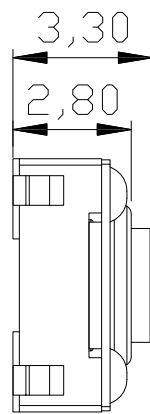
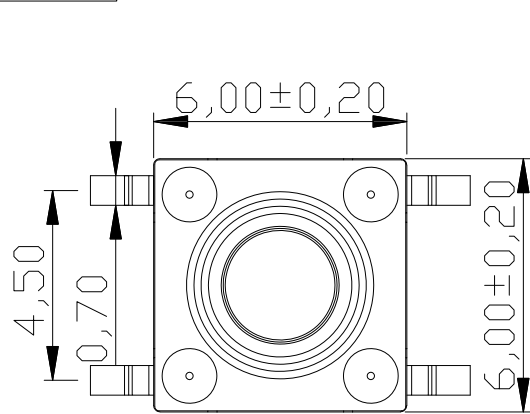


IP67



P.C.B MOUNTING PATTERN DIMENSION

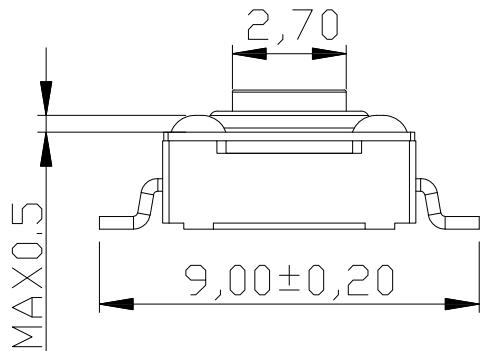

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	50mΩ Max.		
Travel	0.30 ± 0.10 mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000		

F	TERMINAL	4	BRASS	Ag plated
E	BASE	1	PPA(BLACK)	
D	CONTACT	1	SUS	Ag plated
C	FILM	1	POLYAMIDE	
B	COVER	1	SUS	
A	STEM	1	PPA(BLACK)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	DATE	MATL	TITLE	SWITCH
	Jack Lu 07/01/21	FINISH	MODLE	TACT SWITCH 6X6 SMT WATERPROOF TYPE
	CHECKED BY: DATE	SCALE	DWG NO.	SIZE
	Jacky Chen 07/01/21	1 : 1	TS-A67W-x-S428	A4
	APPROVED BY: DATE	SHEET NO.	PART NO.	VER
	Tony Kao 07/01/21	1 of 1	TS-A67W-x-S428	R

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM