







IP67

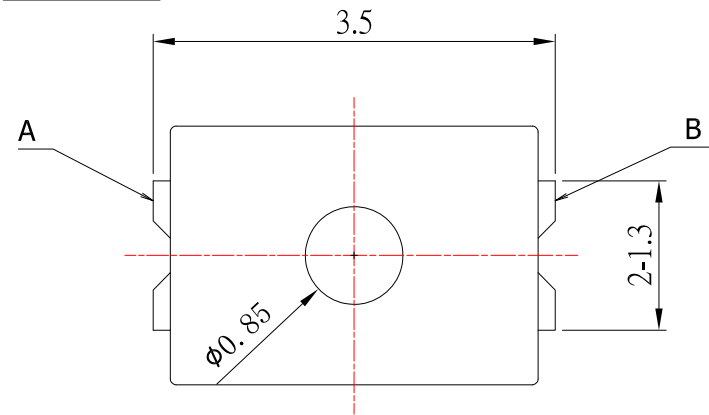

CIRCUIT DIAGRAM

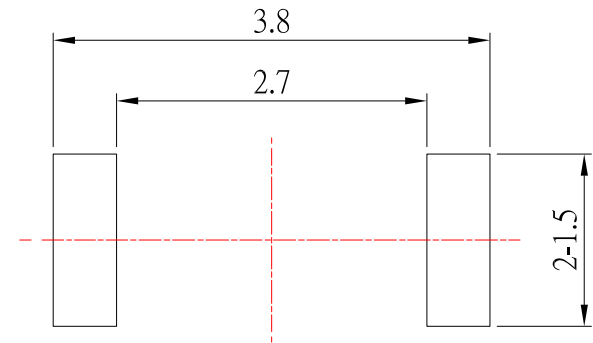

P.C.B LAYOUT MOUNTING PATTERN

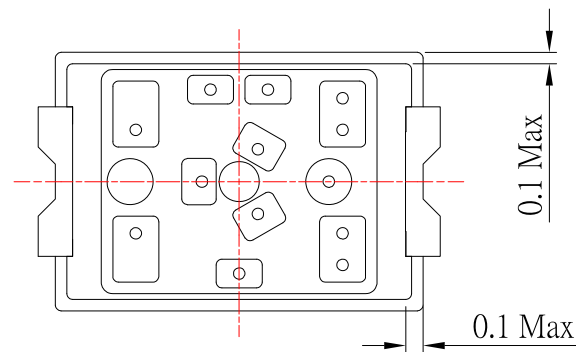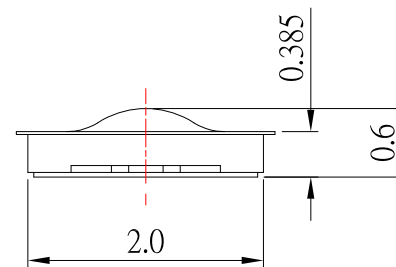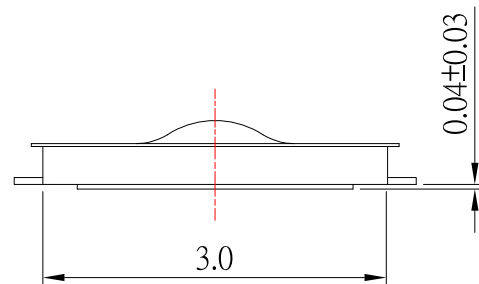

SPECIFICATIONS

Rating	DC 15V 20mA			
Contact Resistance	500mΩ Max.			
Travel	0.13 ± 0.1mm			
Operating Force	3	240 ± 70gf	4	330 ± 70gf
Operating Life (cycles)	500,000		300,000	



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 06/19/18
DATE: 06/19/18
DATE: 06/19/18

MATL		TITLE	SWITCH	
FINISH		MODLE	TACT SWITCH(內置按鈕)for Waterproof	
SCALE	1 : 1	DWG NO.	TS-A29A-x-S048	SIZE A4
SHEET NO.	1 of 1	PART NO.	TS-A29A-x-S048	VER R5

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	更新尺寸	Jack	061919
4	新增尺寸公差	Jack	061418
3	IP67標示位置更新	Jack	091417
2	更新尺寸	Jack	081816
1	新增Water-proof level	Jack	081616