

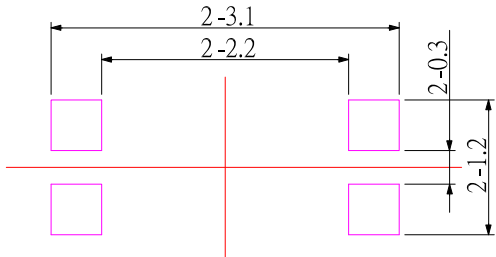

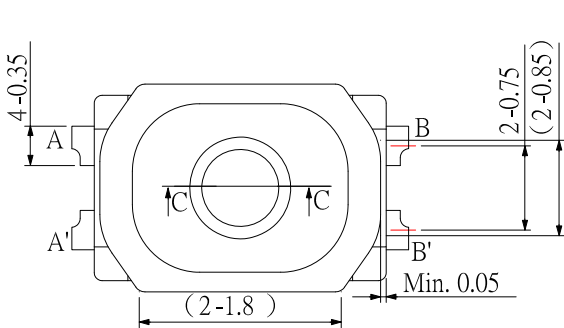




IP67

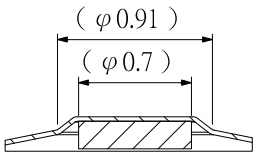

PCB LAYOUT

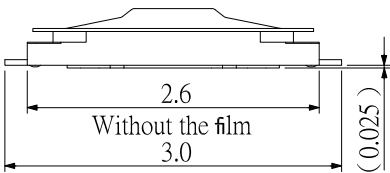

Actuator cross section (Section C-C)

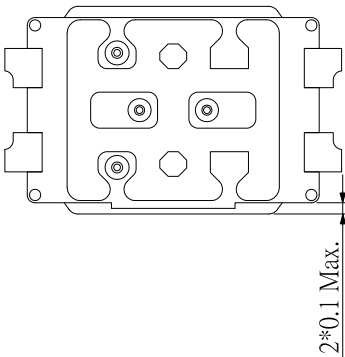

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 15V, 20mA.				
Insulation Resistance	50 MΩ Min.				
Contact Resistance	500 mΩ Max.				
Dielectric Withstanding Voltage	AC 250V for 1 min				
Operating Force	0	100 ± 30gf	2	160 ± 50gf	3 240 ± 50gf
Travel	0.08mm		0.11mm		
Operating Life (cycles)	500,000				



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

06/07/22

MAT'L

TITLE

SWITCH

CHECKED BY:

Jacky Chen

DATE

06/07/22

FINISH

MODLE

TACT SWITCH

APPROVED BY:

Tony Kao

DATE

06/07/22

SCALE

1 : 1

DWG NO.

TS-A30W-x-S182

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------