
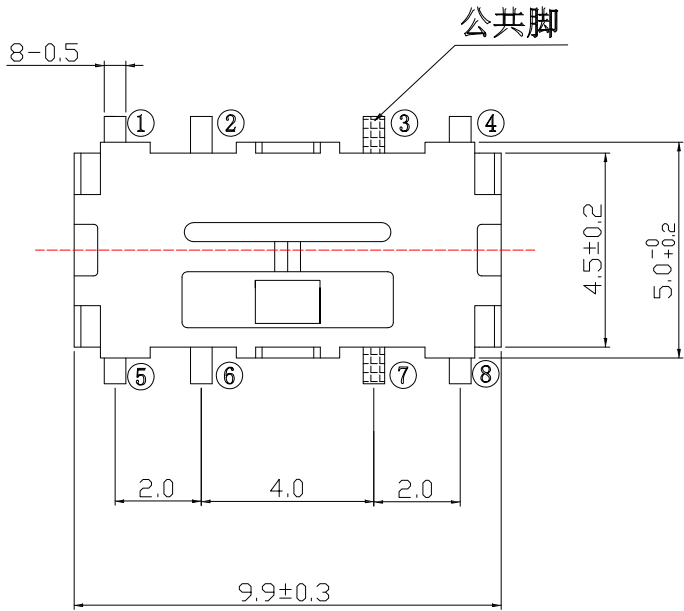




CIRCUIT DIAGRAM

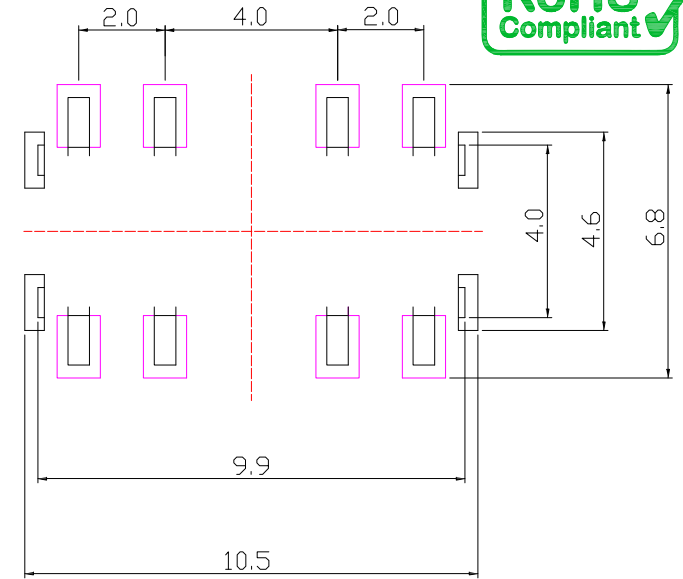

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	50mA , 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 70gf
Operating Life	10,000 cycles

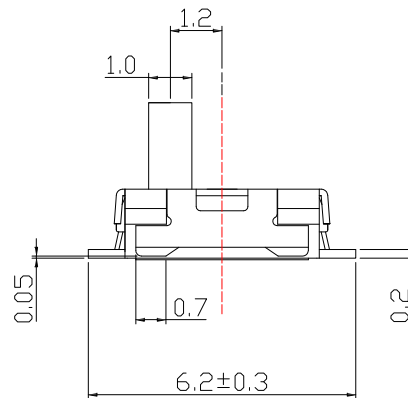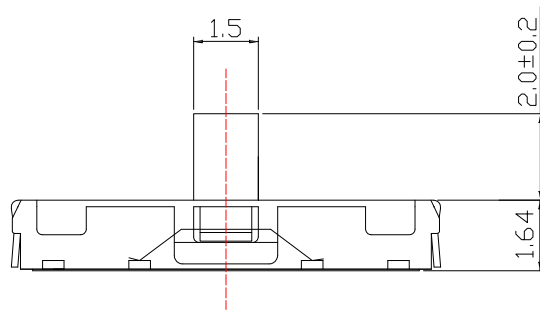

E	CLIP	2	PHOSPHOR BRONZE	Ag plated
D	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
C	BASE	1	PA6T(White)	
B	COVER	1	SUS	Ni plated
A	SLIDER	1	PA46(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
07/27/21
DATE
07/27/21
DATE
07/27/21

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
SLIDE SWITCH 2P3T W/I GROUND TERMINAL
SS-C95GB-S246
SS-C95GB-S246
SIZE
A4
VER
R1

1	更新圖面	Jack	072721
ITEM NO.	DESCRIPTION	DRAWN	DATE