



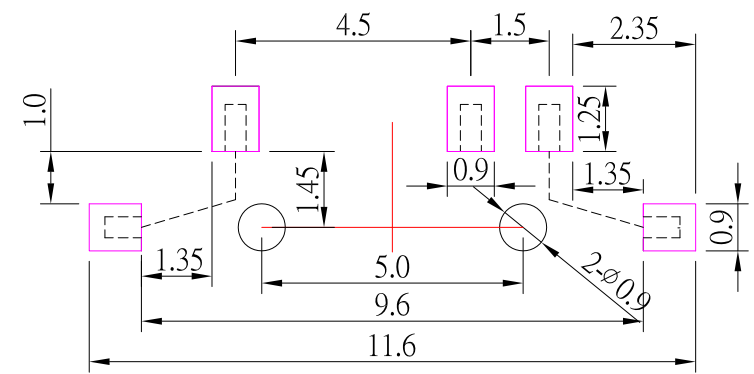




SS-C11AP1-x-S246

SLIDER COLOR :

Black : B
White : W

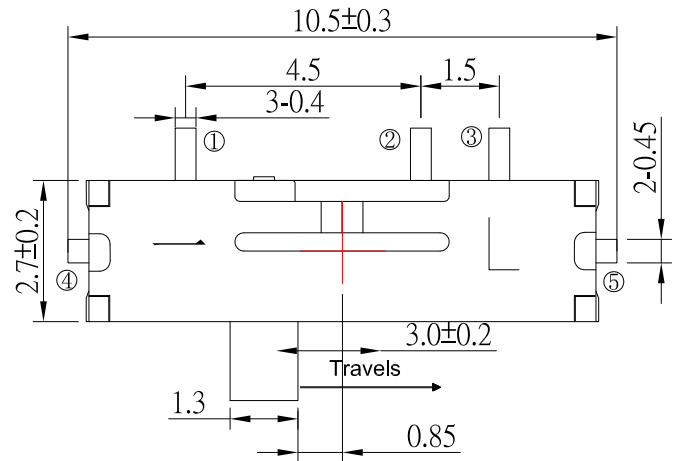

P.C.B LAND PATTERN

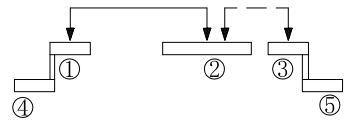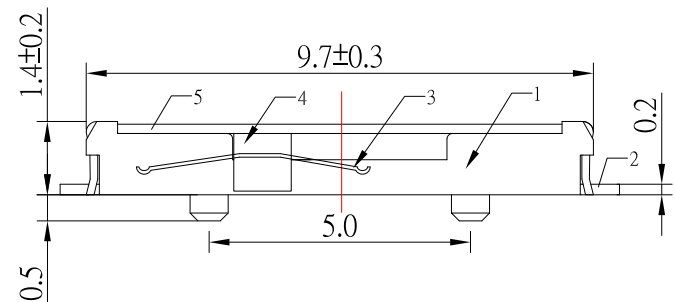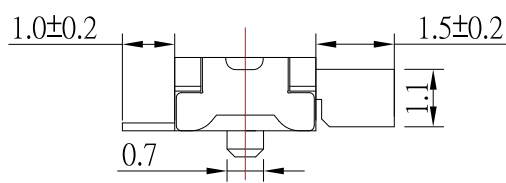

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V , 100mA
Contact Resistance	100mΩ Max
Insulation Resistance	100MΩ Min
Operating Force	150 ±50gf
Life	10,000 cycles

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP(Black)	
A	SLIDER	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	DRAWN BY:	DATE	MAT'L	TITLE
	Jack Lu	03/15/22		SWITCH
	CHECKED BY:	DATE	FINISH	MODLE
	Jacky Chen	03/15/22		SLIDE SWITCH 2 段式 , 行程 3.0mm /磷銅
	APPROVED BY:	DATE	SCALE	DWG NO.
	Tony Kao	03/15/22	1 : 1	SS-C11AP1-x-S246
			SHEET NO.	PART NO.
			1 of 1	SS-C11AP1-x-S246
				SIZE
				A4
				VER
				R10

9	更新樣式	Jack	012121
8	新增尺寸	Jack	080620
7	更新樣式	Jack	060320
6	更新圖面	Jack	040120
5	更新樣式	Jack	083019
4	更新材質	Jack	061119
3	更新CIRCUIT DIAGRAM	Jack	082418
2	新增pcb layout尺寸	Jack	081418
1	更新Operating Force	Jack	110217
ITEM NO.	DESCRIPTION	DRAWN	DATE

東莞市高迪電子有限公司

DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			