



SS-B91APxx-x-S246

Model No.	X (mm)
SS-B91AP	1.5
SS-B91APK	2.0
SS-B91APL	2.5


SLIDER COLOR :

Black : B


White : W

COVER PLATING :

Model No.	Plating
BLANK	Nickel
1	Ag



CIRCUIT DIAGRAM

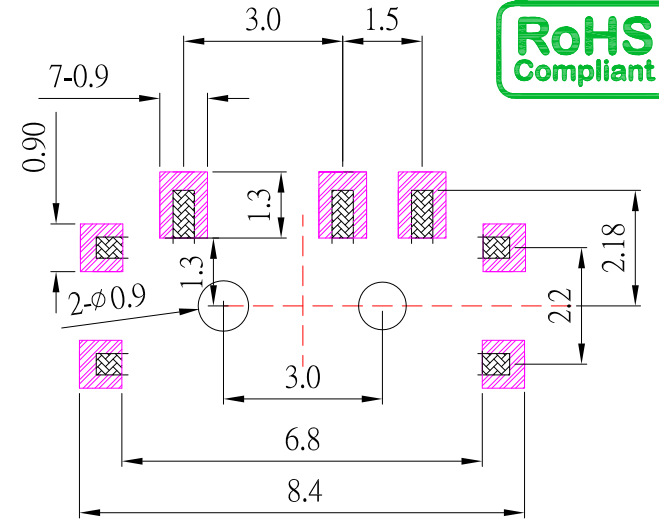

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	100MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	150 ± 30gf
Operating Life	10,000 cycles

E	COVER	1	SUS	
D	SLIDER	1	PA46(Black)/PPA(White)	
C	CLIP	1	PHOSPHOR BRONZE	Ag plated
B	TERMINAL	1	PHOSPHOR BRONZE	Ag plated
A	BASE	1	LCP(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

8	新增COVER PLATING选项	Jack	022124
7	新增PCB LAYOUT尺寸	Jack	050322
6	更新Operating Force	Jack	101221
5	更新Operating Force	Jack	011521
4	新增操作行程	Jack	011221
3	更新材質	Jack	112620
2	更新圖面	Jack	112520
1	新增柄長选项	Jack	090420
ITEM NO.	DESCRIPTION	DRAWN	DATE



TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 02/21/24
DATE: 02/21/24
DATE: 02/21/24

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE
DWG NO. SS-B91APxx-x-S246
PART NO. SS-B91APxx-x-S246

SIZE: A4
VER: R8