
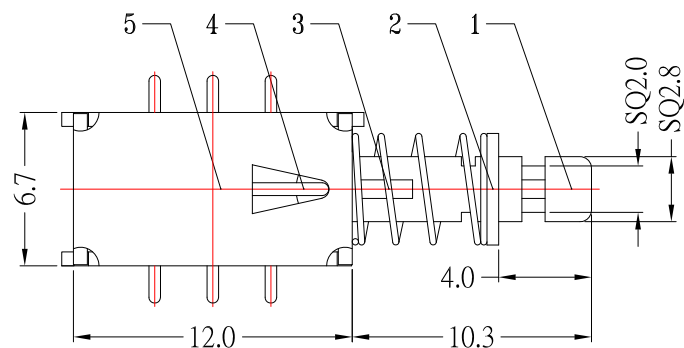
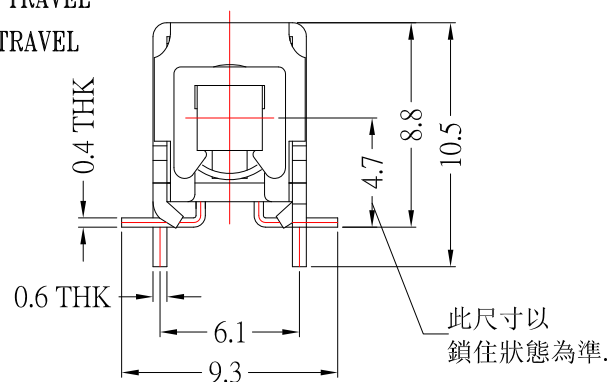


SCHEMATIC

P.C.B LAYOUT MOUNTING PATTERN
TOP VIEW

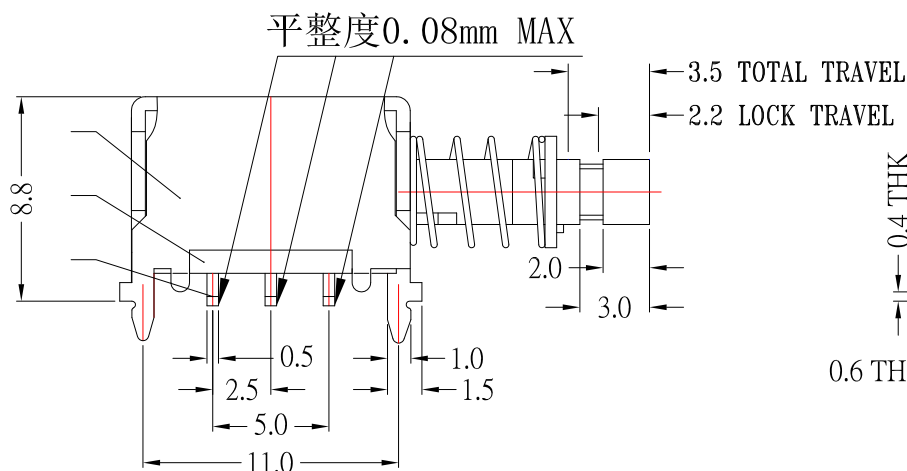

SPECIFICATIONS

- 1.Rating : DC50V, 0.3A
- 2.Circuit : 2P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 300 ± 100 gf
- 5.Life test : 10,000 cycles

9	Contact Clip	2	PBS	Ag-Plating
8	Terminal	6	Brass	Ag-Plating
7	Base	1	Phenolic Resin	Natural
6	Frame	1	Stainless Steel	Ni-Plating
5	Spring Plate	1	PBS	Natural
4	Cam Stick	1	BRASS Wire	Ni-Plating
3	Spring	1	Steel Wire	Ni-Plating
2	Block	1	Stainless Steel	Ni-Plating
1	Knob	1	LCP(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 04/24/23

CHECKED BY: Jacky Chen
DATE: 04/24/23

APPROVED BY: Tony Kao
DATE: 04/24/23

MAT'L		TITLE	SWITCH
FINISH		MODLE	PUSH SW 2P2T SMT TYPE
SCALE	1 : 1	DWG NO.	PS-22E25S-B-S191
SHEET NO.	1 of 1	PART NO.	PS-22E25S-B-S191
		SIZE	A4
		VER	R