

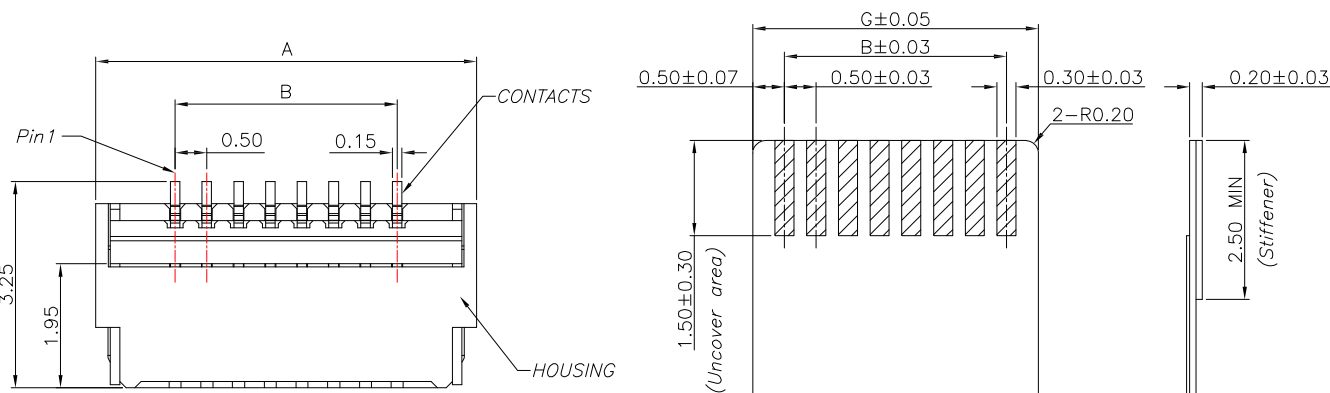


Figure 1: Schematic diagram of the proposed device. The diagram shows a top-down view of a device with a central array of six rectangular elements. Dimensions are given in micrometers (μm) and millimeters (mm). Key dimensions include: total width 3.30 mm, total length 2.90 mm, element width 0.50 μm , element spacing 0.30 μm , and various offsets and distances labeled A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z. A metal mask is indicated on the left side.

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	± 0.3°				

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	08/09/23					
CHECKED BY:	DATE	FINISH		MODLE	0.5mm H:1.0 FPC 後掀式 Cable T:0.2mm	
Jacky Chen	08/09/23	SCALE	1 : 1	DWG NO.	FPC05L-10xx-C2-S149	SIZE
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	FPC05L-10xx-C2-S149	A4
Tony Kao	08/09/23					VER
						R1