



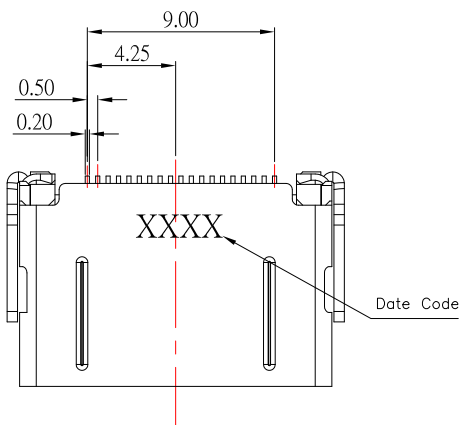



HDMI-19P-SND23x-S455

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

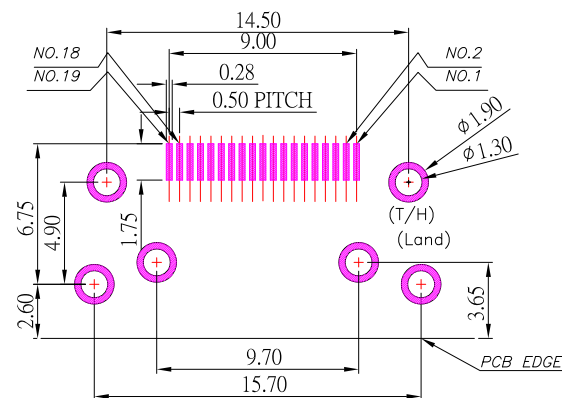

RECOMMENDED P.C.B. LAYOUT

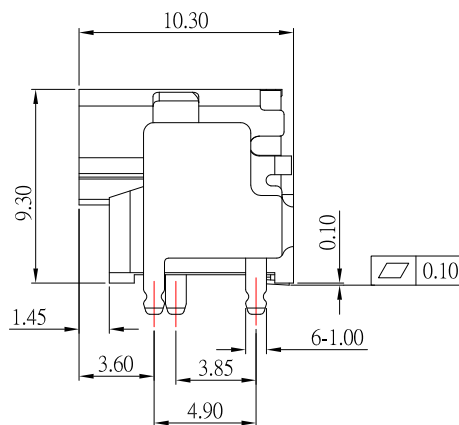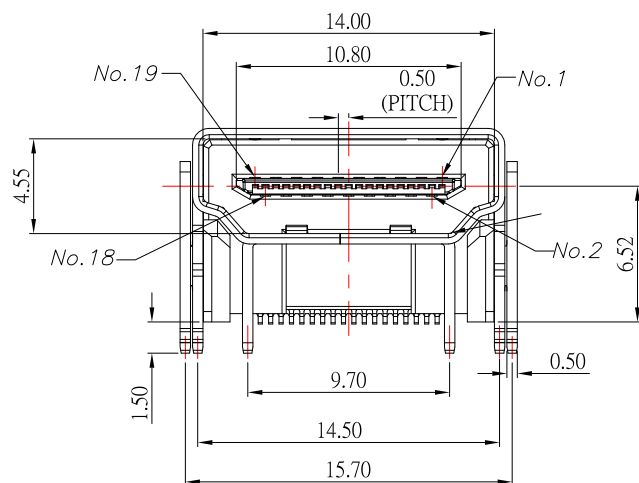

NOTE:

1.MATERIAL:

- 1.1 HOUSING: LCP
- 1.2 CONTACT: BRASS
- 1.3 SHELL: SUS

2.PLATING :

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.ELECTRICAL:

- 3.1 RATING: 40V , 0.5A
- 3.2 CONTACT RESISTANCE: 30mΩ MAX
- 3.3 INSULATION RESISTANCE: 100MΩ MIN
- 3.4 WITHSTANDING VOLTAGE: 500V AC
- 3.5 OPERATING TEMPERATURE: -25°C~ 85°C

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
10/19/22
DATE
10/19/22
DATE
10/19/22

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	HDMI AF 90 度 SMT 加高型 H9.3mm
SCALE	1 : 1	DWG NO.	HDMI-19P-SND23x-S455
SHEET NO.	1 of 1	PART NO.	HDMI-19P-SND23x-S455

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------

A B C D E F G H I J