
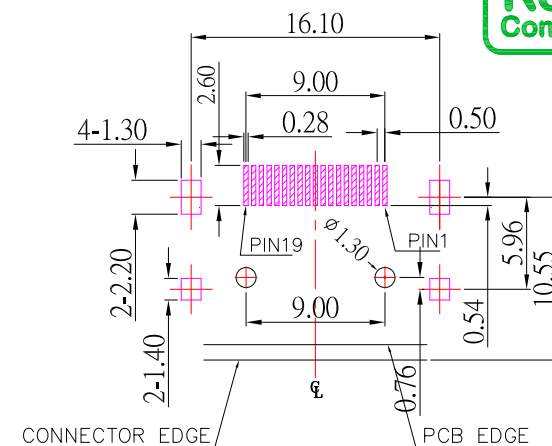
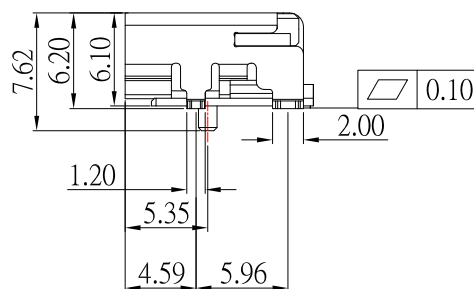

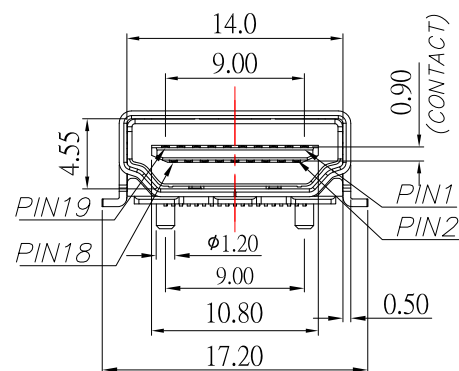


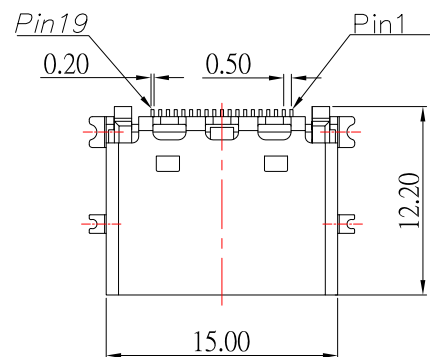

NOTE:

1.MATERIAL:

- 1.1 HOUSING: LCP , BLACK
1.2 CONTACT: BRASS
1.3 SHEEL: SPCC

2.PLATING :

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

3.SPECIFICATIONS:

3.1 ELECTRICAL CHARACTERISTICS

- 3-1. CURRENT RATING: 0.5 A
- 3-2. VOLTAGE RATING: 40 V
- 3-3. CONTACT RESISTANCE: 30m Ω MAX
- 3-4. INSULATION RESISTANCE: 100M Ω MIN
- 3-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

4.LIFE TEST: 10000 CYCLES

5.OPERATING TEMPERATURE: -25°C TO +85°C



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.



UNITS

MM

DRAWN BY:	DATE
Jack Lu	08/02/22

CHECKED BY:	DATE
Jacky Chen	08/02/22

APPROVED BY:	DATE
Tony Kao	08/02/22

DATE _____

08/02/20

DATE _____

08/02/20

--	--

2	MATL
---	------

FINISH

2	SCALE
---	-------

--	--

FILE

MODLE

DWG NO.

--	--

CONNECTOR

HDMI AF 全貼有柱

HDMI 10P SESI S207

	A4
	VFE

	R1
--	----