



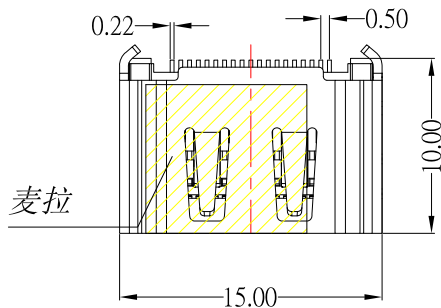




HDMI-19P-RV1-x-S165

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

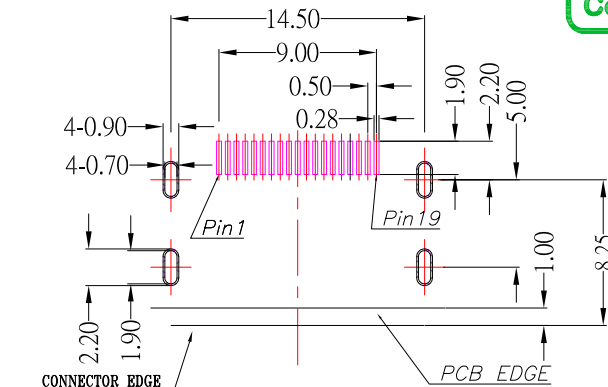

RECOMMENDED PCB LAYOUT (TOP VIEW)

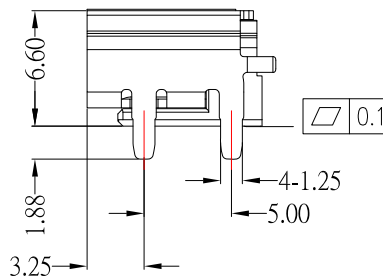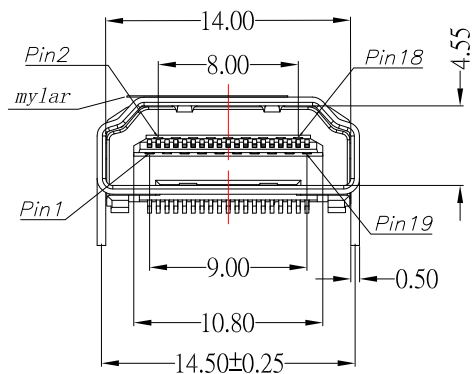

NOTE:

1.MATERIAL:

1.1 HOUSING: LCP, BLACK

1.2 CONTACT: BRASS

1.3 SHEEL: BRASS

2.PLATING :

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.MECHANICAL:

3.1 INSERTION FORCE: 4.5 Kgf MAX

3.2 WITHDRAWAL FORCE: 1.0 ~ 4.0 Kgf

4.ELECTRICAL:

4.1RATING: 40V,0.5A

4.2 CONTACT RESISTANCE: 30 mΩ Max

4.3 INSULATION RESISTANCE: 100MΩ Min

4.4 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC / minute

4.5 OPERATING TEMPERATURE: -25°C~ 85°C



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

09/27/21

CHECKED BY:

Jacky Chen

DATE

09/27/21

APPROVED BY:

Tony Kao

DATE

09/27/21

MAT'L

TITLE

CONNECTOR

FINISH

MODLE

HDMI A TYPE FEMALE

SCALE

1 : 1

DWG NO.

HDMI-19P-RV1-x-S165

SIZE

A4

SHEET NO.

1 of 1

PART NO.

HDMI-19P-RV1-x-S165

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------