
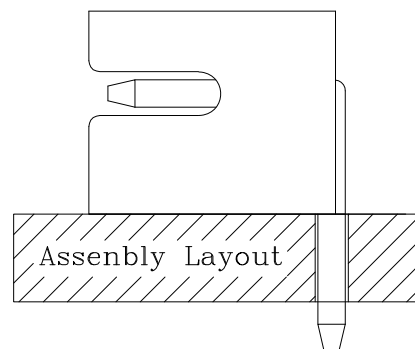
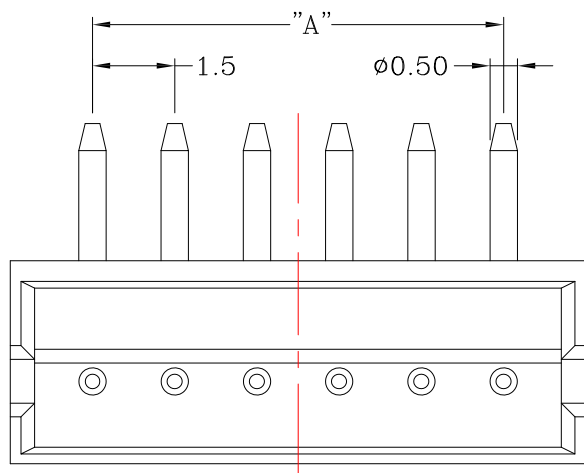
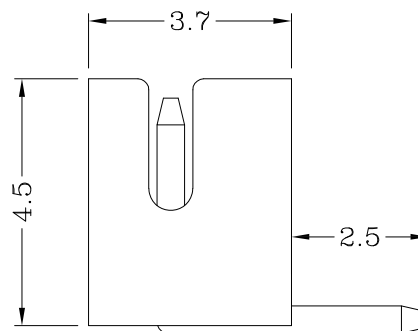


P.C.B LAYOUT MOUNTING PATTERN

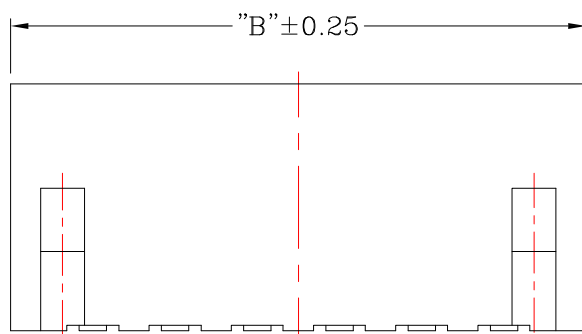

SPECIFICATIONS

- 1.Current rating : 1.0A
- 2.Voltage rating : 50V, AC / DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 1000MΩ min.
- 5.Contact resistance : 20mΩ/Max
- 6.Withstand Voltage : 500V AC / minute

Material:

- 1.Housing : PA46
- 2.Contact : Brass,Tin over Nickel

	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
DIM.A	1.50	3.00	4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50
DIM.B	4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50	24.00	25.50

				東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD						DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR	
										Jack Lu	10/14/24	FINISH		MODLE	WAFER 1.5 PIN 90度	
										Jacky Chen	10/14/24		SCALE	1 : 1	DWG NO.	WF-1500RDxx-S304
										APPROVED BY: DATE		SHEET NO.	1 of 1	PART NO.	WF-1500RDxx-S304	VER
										Tony Kao	10/14/24					
1	更新樣式	Jack	101424	TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3	3RD. ANGEL'S		UNITS	MM					
ITEM NO.	DESCRIPTION	DRAWN	DATE													

1	更新樣式	Jack	101424
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3	3RD. ANGEL'S		UNITS	MM
--	--	--------------------------------------	-----------------	--	-------	----