

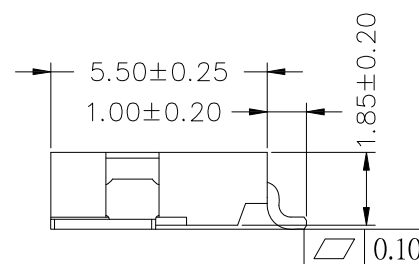
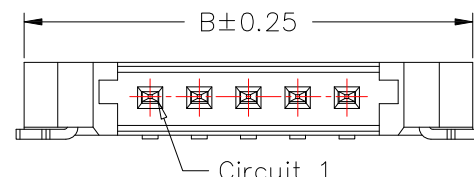
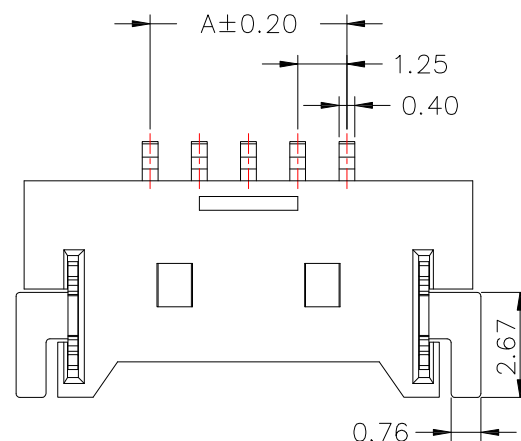


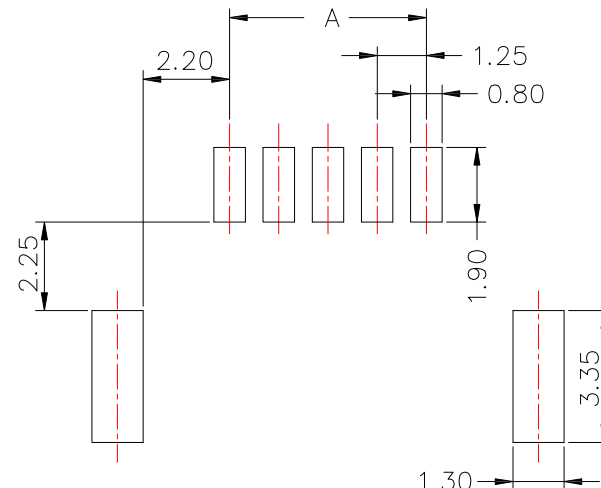


SPECIFICATIONS

Current rating : 1.0A AC , DC
Voltage rating : 125V AC , DC
Temperature rating : -25°C ~ +85°C
Insulation resistance : 100M Ω min.
Withstand voltage : 500V AC/minute
Contact resistance : 20m Ω /Max
Material:
Housing : PA6T
Contact : Brass,Gold plated

P.C.B LAYOUT MOUNTING PATTERN

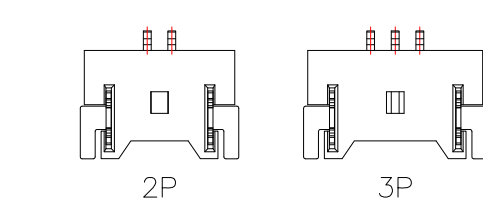

02~20P

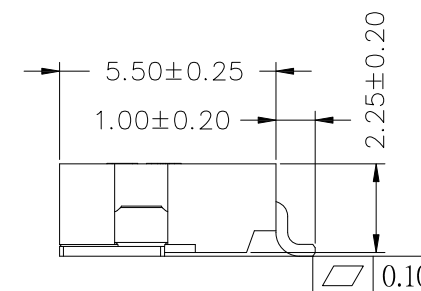

30P

PIN NO.	Dimension mm	
	A	B
02	1.25	7.65
03	2.54	8.90
04	3.75	10.15
05	5.00	11.30
06	6.25	12.65
07	7.50	13.90
08	8.75	15.15
09	10.00	16.40
10	11.25	17.65
11	12.50	18.90
12	13.75	20.15
13	15.00	21.40
14	16.25	22.65
15	17.50	23.90
20	23.75	30.15
30	36.25	42.65

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
07/12/18
DATE
07/12/18
DATE
07/12/18

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
WAFER 1.25 SMT 90度 超薄
WF-1253RSxx-S304
WF-1253RSxx-S304

SIZE
A4
VER
R1