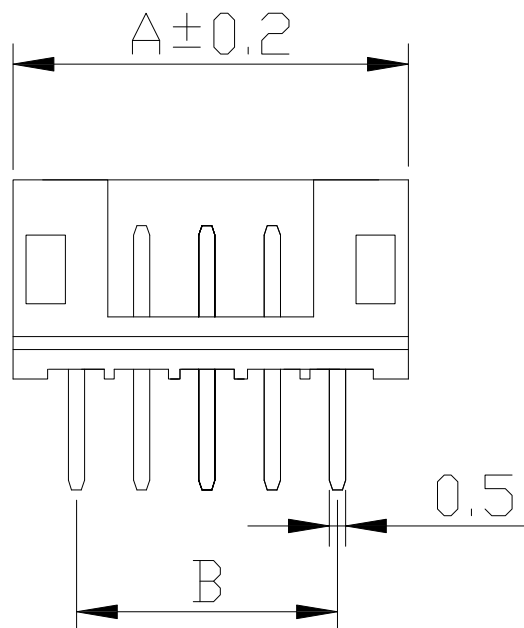
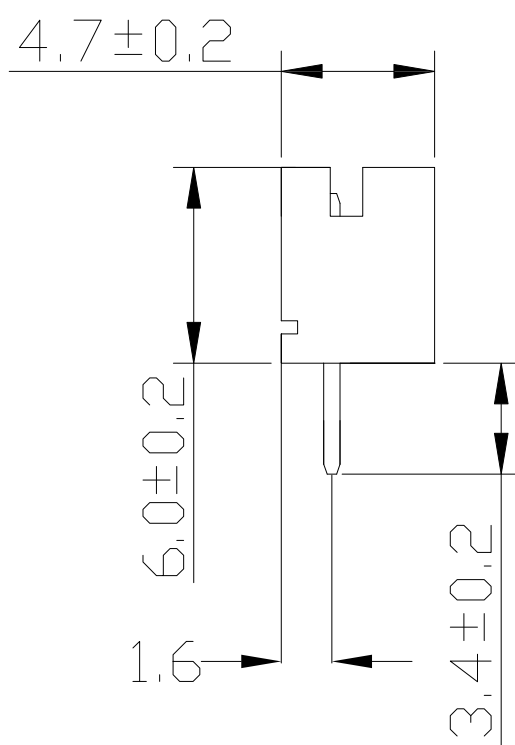


P.C.B LAYOUT MOUNTING PATTERN

POLES	DIMENSIONS(mm)	
	A	B
2	6.0	2.0
3	8.0	4.0
4	10.0	6.0
5	12.0	8.0
6	14.0	10.0
7	16.0	12.0
8	18.0	14.0
9	20.0	16.0
10	22.0	18.0
11	24.0	20.0
12	26.0	22.0
13	28.0	24.0
14	30.0	26.0
15	32.0	28.0
16	34.0	30.0

SPECIFICATIONS

Current rating : 2.0A AC , DC

Voltage rating : 250V AC , DC

Temperature rating : -25°C ~ +85°C

Insulation resistance : 1000MΩ min.

Withstand voltage : 800V AC/minute

Contact resistance : 10mΩ/Max

Material:

Housing : PA66

Contact : Brass,Tin over Nickel