
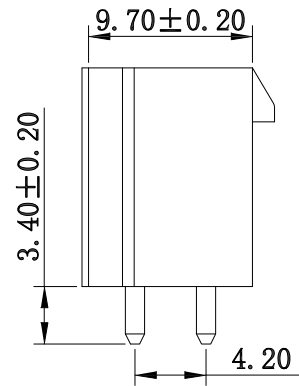


P.C.B LAYOUT MOUNTING PATTERN

PART NO.	Dimensions (mm)	
	A	B
02	—	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

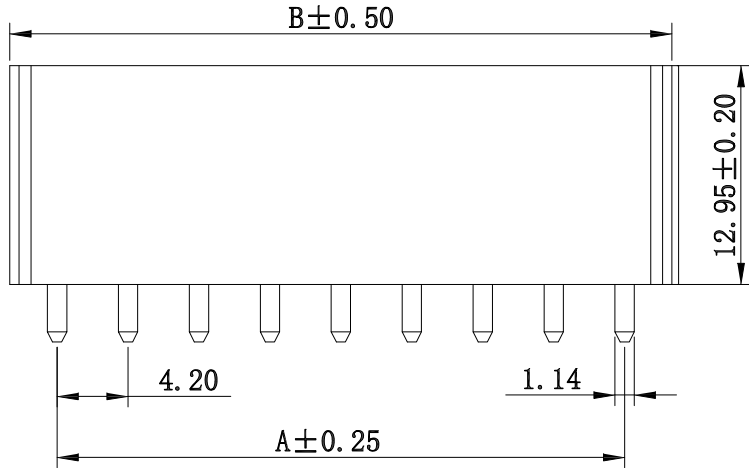

SPECIFICATIONS

Current rating : 7.0A AC , DC
Voltage rating : 250V AC , DC
Temperature rating : -25°C ~ +85°C
Insulation resistance : 1,000 M Ω min.
Withstand voltage : 1500V AC/minute
Contact resistance : 10 m Ω max.
Material:
Housing : Nylon 66
Pin : Brass / Tin-plated



TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	07/05/19	FINISH		MODLE	MINI FIT JR VERTICAL POWER CONNECTOR PH: 4.2mm
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	WF-4255VD2xx-S304
Jacky Chen	07/05/19	SHEET NO.	1 of 1	PART NO.	WF-4255VD2xx-S304
APPROVED BY:	DATE				
Tony Kao	07/05/19				