
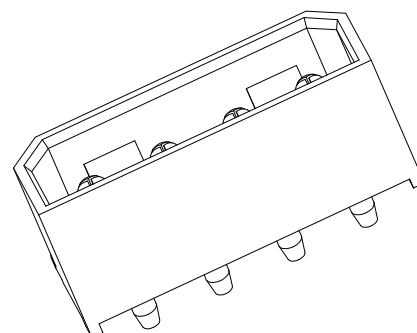
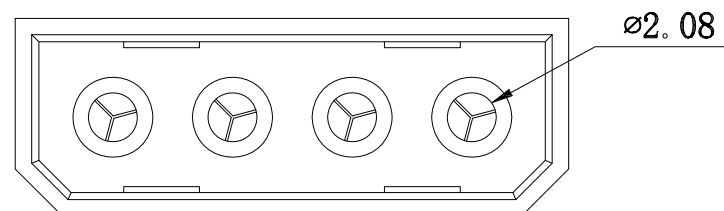
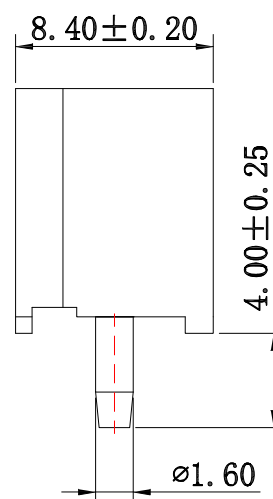


P. C. B LAYOUT

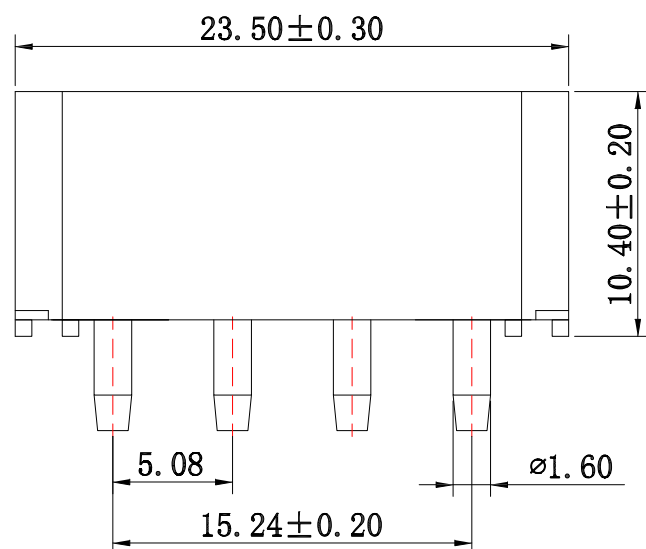

SPECIFICATIONS

Current rating : 5.0A AC , DC
Voltage rating : 250V AC , DC
Temperature rating : -25°C ~ +85°C
Insulation resistance : 1,000 MΩ min.
Withstand voltage : 1,500V AC/minute
Contact resistance : 20 mΩ /Max
Material:
Base : Nylon66
Pin : Brass / Tin-plated

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	11/17/17	FINISH		MODLE	WAFER 5.08 DIP 大四P 180度
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	WF-5080VD04-S304
Jacky Chen	11/17/17	SHEET NO.	1 of 1	PART NO.	WF-5080VD04-S304
APPROVED BY:	DATE				
Tony Kao	11/17/17				

ITEM NO.	DESCRIPTION	DRAWN	DATE