

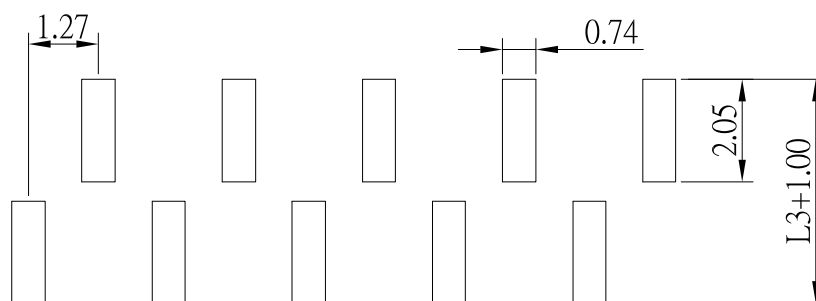



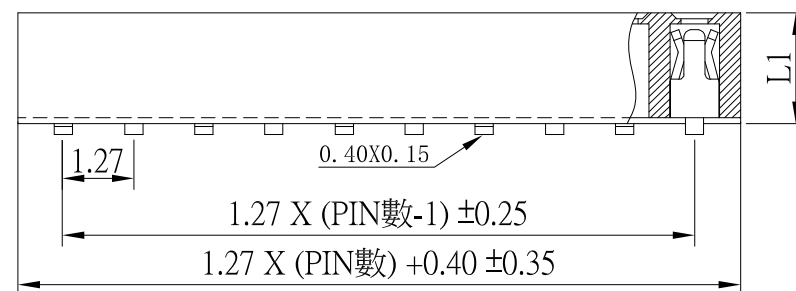

FH-C81-31xxx-S304

	L1	L2	L3	L4
A	2.10	2.35	3.25	2.00
B	4.30	4.55	3.50	1.90

PIN選項

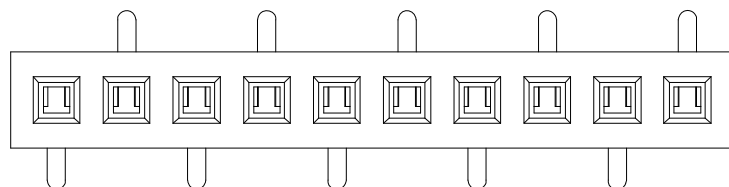

P.C.B. Layout

SPECIFICATIONS:

- 1.Current Rating : 1.0 AMP
- 2.Insulation Resistance : 1000M Ω Min
- 3.Dielectric Withstanding : AC 500V
- 4.Contact Resistance : 20m Ω Max
- 5.Operation Temperature : -40 $^{\circ}$ C to +105 $^{\circ}$ C

MATERIALS:

- 1.Contact Material : Phosphor Bronze
- 2.Insulator Material : PA6T
- 3.Contact Finish : Au over Nickel



TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^{\circ}$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	Female Header
Jack Lu	10/20/21	FINISH	MODLE	1.27排母 單排 SMT 180 度 左下為第一PIN
CHECKED BY:	DATE	SCALE	DWG NO.	FH-C81-31xxx-S304
Jacky Chen	10/20/21	1 : 1	PART NO.	FH-C81-31xxx-S304
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	10/20/21			