



PH-C12-x2xxx-S304

Insulator Material: 3 : PA6T
4 : PA9T

PIN數



	L1	L2	L3	L4	L5
A	3.0	1.0	2.3	3.4	0.6
B	1.7	1.5	1.7	3.4	2.1
C	4.5	2.5	2.8	3.0	0.6
D	3.0	1.0	2.8	3.4	0.6
E	3.0	1.5	3.0	3.4	2.1
F	1.5	1.0	3.15	3.4	0.9
G	3.0	2.0	3.0	3.0	1.0

MATERIAL:



- 1.Contact Material: Brass
- 2.Insulator Material: Polyester
- 3.Contact Plating: Gold Plated

ELECTRICAL:

- 1.Current Rating: 1.0 Amps/contact max.
- 2.Contact Resistance: $\leq 20\text{m}\Omega/\text{contact}$.
- 3.Insulator Resistance: $\geq 1,000\text{ M}\Omega$
- 4.Withstanding Voltage: 500V AC/ minute.

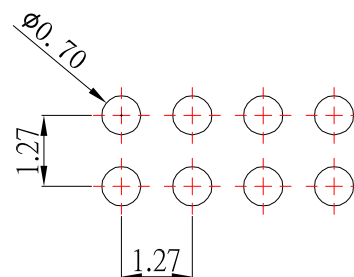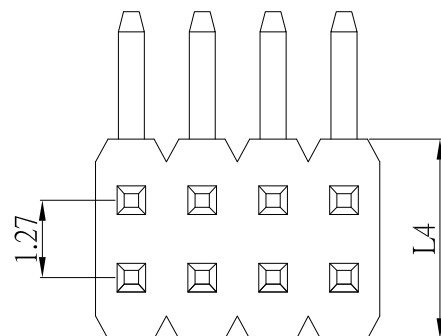

Recommended P.C.B Layout

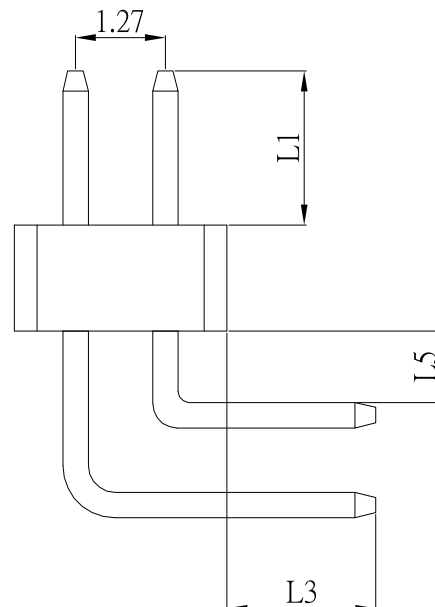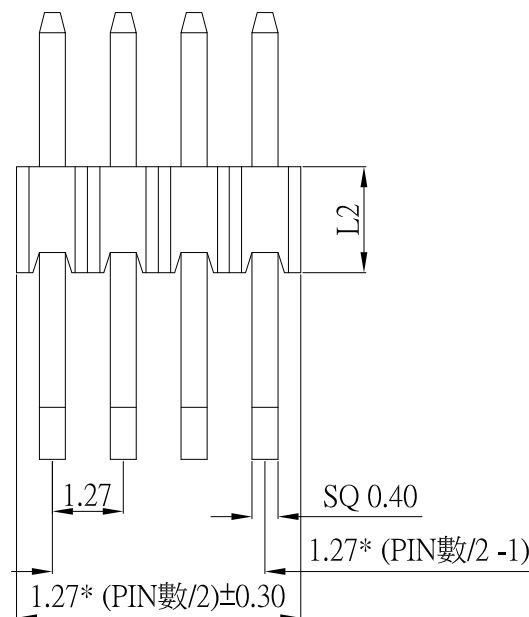

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	Pin Header
Jack Lu	11/22/21	FINISH	MODLE	1.27 排針雙排90度 2*X PIN數
CHECKED BY:	DATE	SCALE	DWG NO.	PH-C12-x2xxx-S304
Jacky Chen	11/22/21	1 : 1	PART NO.	PH-C12-x2xxx-S304
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	11/22/21			