



PH-B21-31xxx-S304

PIN數





	L1	L2	L3
A	6.0	4.0	3.0
B	6.0	4.5	3.0
C	2.0	4.5	2.0
D	1.5	4.3	1.5
E	4.0	4.2	2.8
F	4.0	8.2	2.8

Specifications

- 1.Current Rating : 1.5 Amp
- 2.Insulator Resistance : 1000 MΩ Min.
- 3.Contact Resistance : 20 mΩ Max.
- 4.Dielectric Withstanding : AC 500 V
- 5.Operating Temperature : -40℃ ~ +105℃

Materials:

- 1.Contact Material : Phosphor Bronze, Au over Ni
- 2.Insulator Material :PA6T

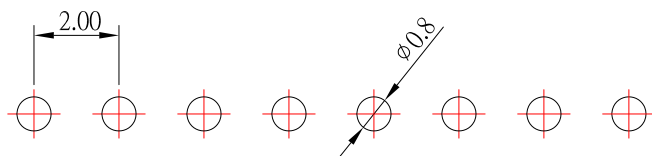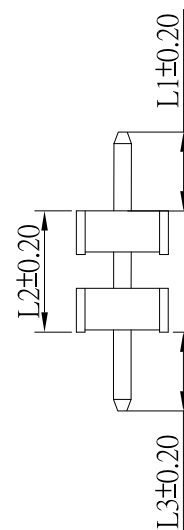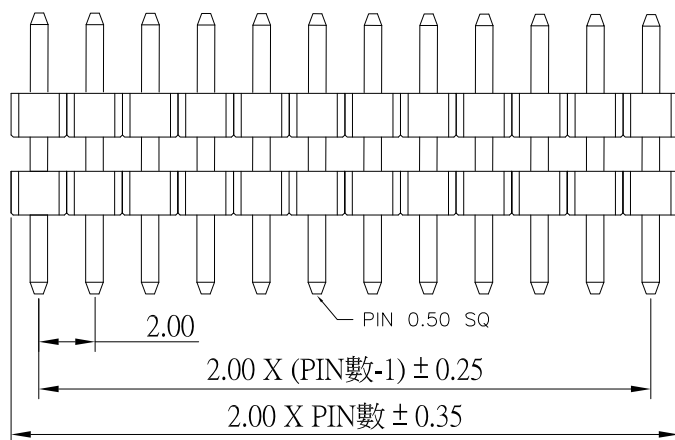

PCB LAYOUT



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	Pin Header
Jack Lu	07/18/19	FINISH	MODLE	2.0排針 雙塑單排 180度
CHECKED BY:	DATE	SCALE	DWG NO.	PH-B21-31xxx-S304
Jacky Chen	07/18/19	1 : 1	PART NO.	PH-B21-31xxx-S304
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	07/18/19			