



PH-B11-32xxx-S304

L高度選項

PIN數選項





	L1	L2	L3
A	4.00	2.00	2.80
B	5.00	2.00	1.50
C	3.80	2.00	3.00
D	3.00	3.50	3.00
E	4.00	1.50	2.80
F	8.00	2.00	2.80
G	7.00	2.00	2.80
H	4.00	2.00	2.20
J	2.00	2.00	2.80

Specifications


- 1.Current Rating : 1.5 Amp
- 2.Insulator Resistance : 1000 M Ω Min.
- 3.Contact Resistance : 20 m Ω Max.
- 4.Dielectric Withstanding : AC 500 V
- 5.Operating Temperature : -40 $^{\circ}$ C ~ +105 $^{\circ}$ C

Materials:

- 1.Contact Material : Brass, Au over Ni
- 2.Insulator Material :PA6T

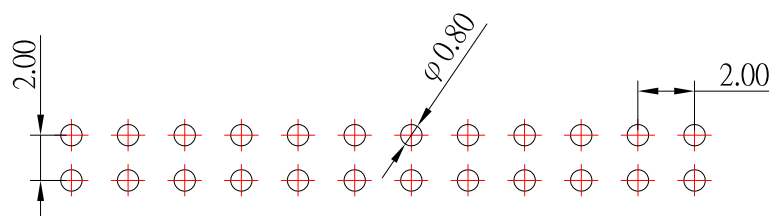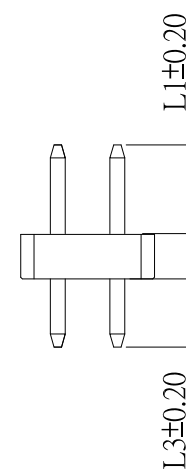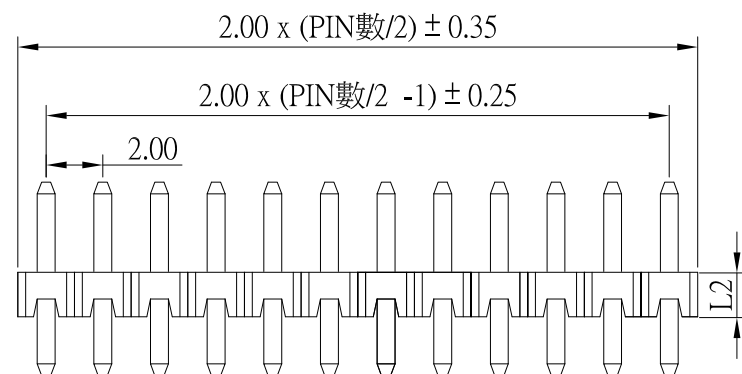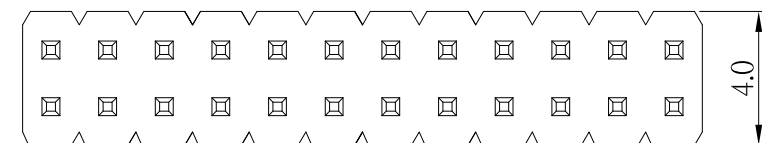

PCB LAYOUT



TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3RD
ANGEL'S
UNITS
MM

DRAWN BY:	DATE	MAT'L	TITLE	Pin Header
Jack Lu	02/25/21	FINISH	MODLE	2.0排針 雙排 V/T DIP
CHECKED BY:	DATE	SCALE	DWG NO.	PH-B11-32xxx-S304
Jacky Chen	02/25/21	1 : 1	PART NO.	PH-B11-32xxx-S304
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	02/25/21			