
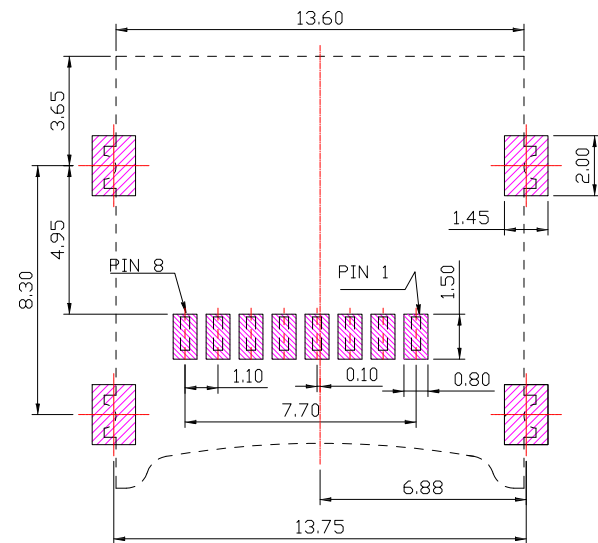
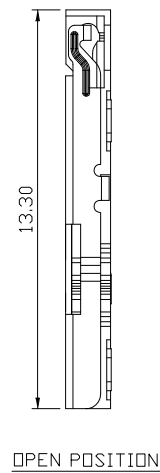
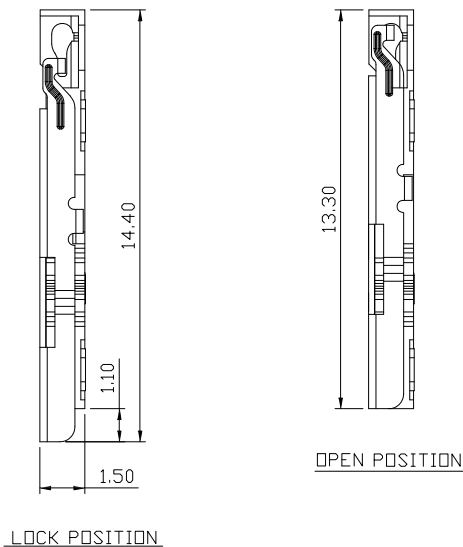


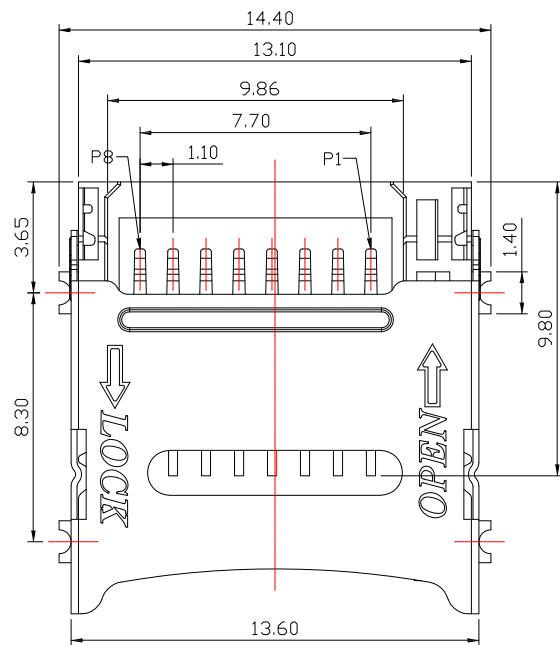

PCB LAYOYT

SPECIFICATION

Electrical :



- 1.Current Rating: 1.0A
- 2.Voltage Rating: 30V
- 3.Contact Resistance: 50 mΩ Max.
- 4.Insulation Resistance: 100 MΩ Min.
- 5.Dielectric Withstanding Voltage: 100V AC

Environmental:

- 1.Operating Temperature: -30°C ~ +80°C.

Material:

- 1.Housing: LCP,UL 94V-0,Black
- 2.Contact: Phosphor Bronze,Gold / Tin Plated over Nickel
- 3.Stator: Phosphor Bronze,Tin Plated
- 4.Shell: Stainless Steel,Nickel Plated

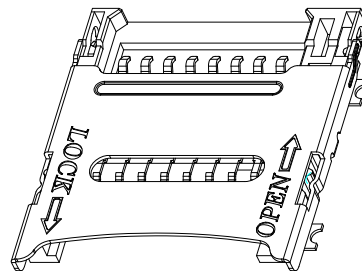

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
11/04/22
DATE
11/04/22
DATE
11/04/22

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MICRO SD Card 掀蓋式 H:1.5mm
SD-TF6158S-S267
SD-TF6158S-S267

SIZE
A4
VER
R4

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新3d樣式	Jack	110422
3	新增鍍層	Jack	080322
2	更新料號	Jack	112421
1	更新為A0版	Jack	013018