
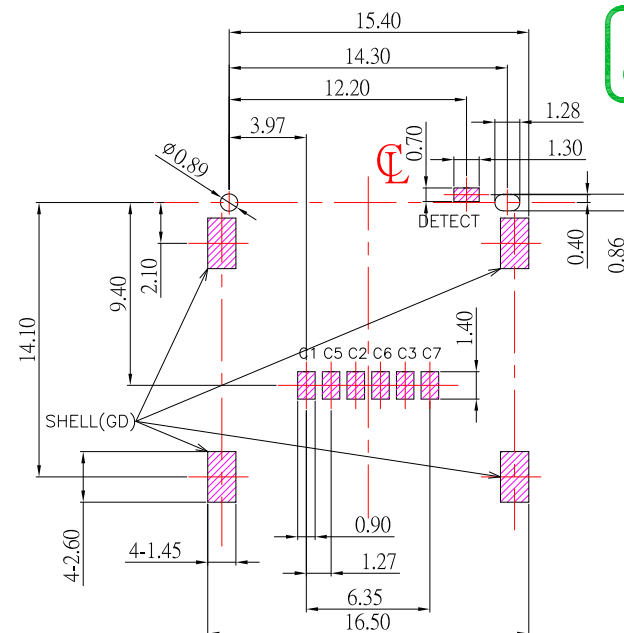
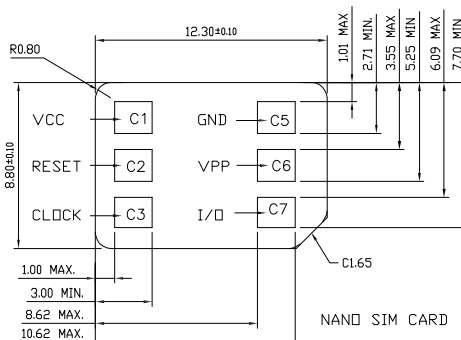
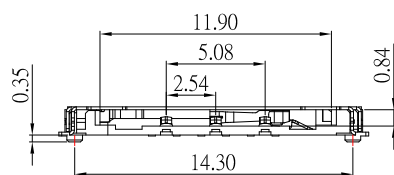
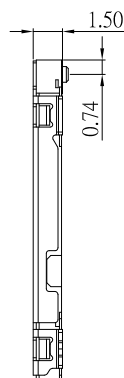
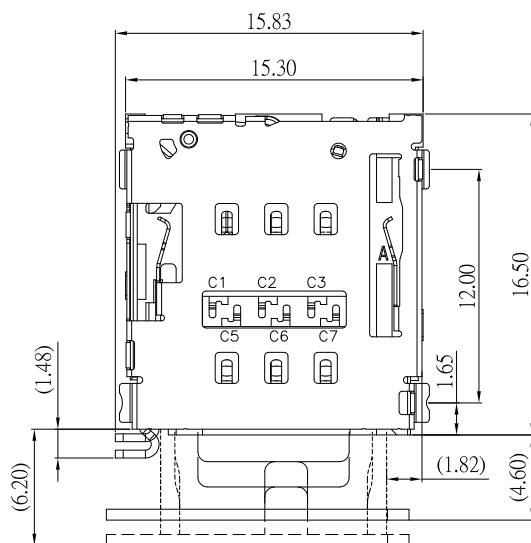




PCB LAYOYT

SPECIFICATION

Electrical :

1. Rating: 0.5A , 50V
- 2.Contact Resistance: 100 mΩ Max.
- 3.Insulation Resistance: 1000 MΩ Min.
- 4.Dielectrec Withstanding Voltage: 250 V AC

Material:

- 1.Housing: LCP , Black
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATERIAL	TITLE	CONNECTOR
Jack Lu	08/11/23			
CHECKED BY:	DATE	FINISH	MODLE	NANO SIM卡托款帶開關 帶偵測PIN
Jacky Chen	08/11/23			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	08/11/23	1 : 1	NSIM-060562-S267	A4
		SHEET NO.	PART NO.	VER
		1 of 1	NSIM-060562-S267	R10