

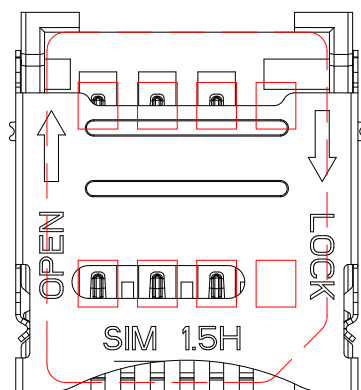
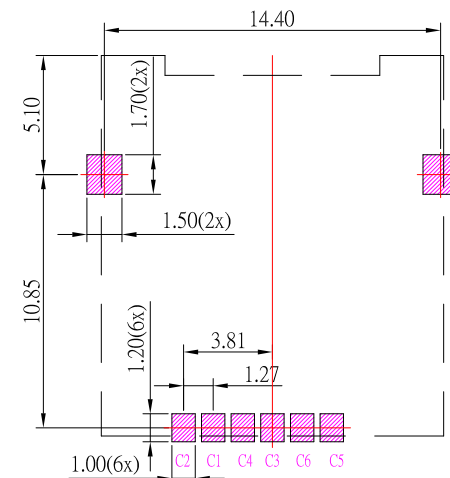
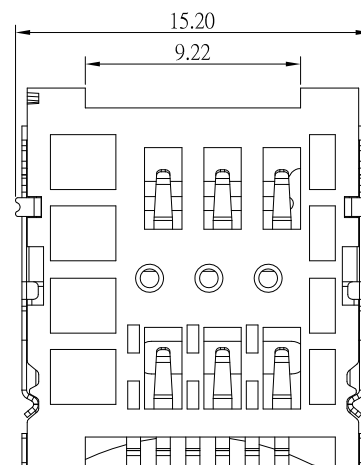
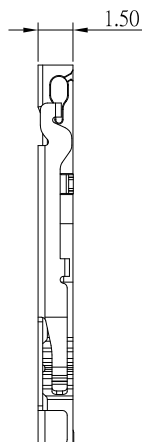


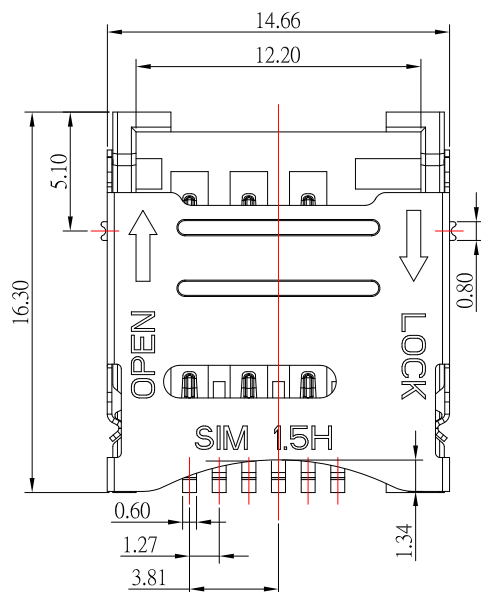

插卡示意圖

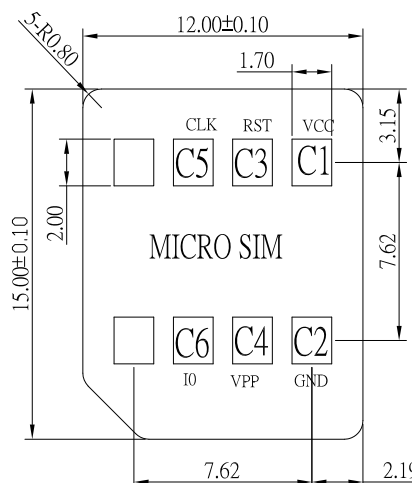

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I0

- 1.Rating: 1.0A
- 2.Contact Resistance: 50 mΩ Max.
- 3.Insulation Resistance: 1000 MΩ Min.
- 4.Dielectrec Withstanding Voltage: 250 V AC
- 5.Operating Temperature: -30℃ ~ +80℃.

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	10/11/2

CHECKED BY:	DATE
Jacky Chen	10/11/2

APPROVED BY:	DATE:
Tony Kao	10/11/20

DATE _____

10/11/2

DATE _____

10/11/2

3.6.4. **FIELD**

MAT L

FINISH

SCALE

	 YATIRIM MENKUL DEĞERLER A.Ş. YATIRIM MENKUL DEĞERLER A.Ş. YATIRIM MENKUL DEĞERLER A.Ş.
--	--

	FILE

MODLE

DWIC NC

	CONVERTER
--	-----------

CONNECTOR	
MICRO SIM 6PIN H1.5 掀蓋	

MSTM 06U150 S267

	SIZE
	A4
	VER
	R

7			
ITEM NO.	DESCRIPTION	DRAWN	DATE