
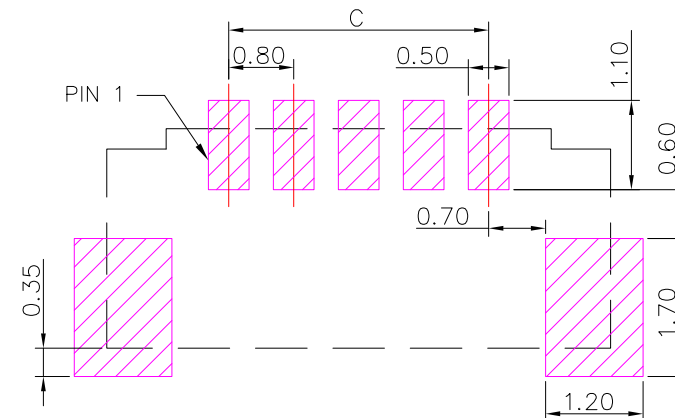

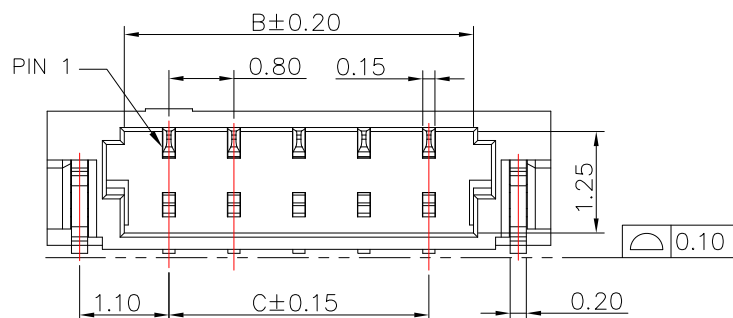


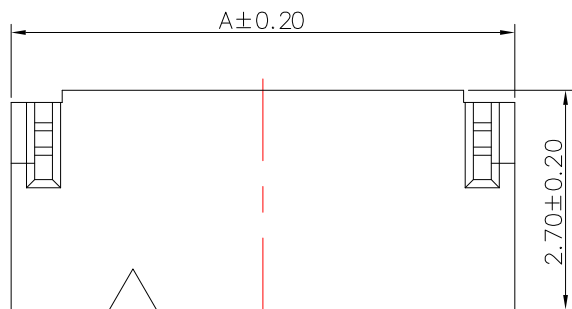

P.C.B LAYOUT MOUNTING PATTERN

PIN No.	Dimensions(mm)			PIN No.	Dimensions(mm)		
	A	B	C		A	B	C
02	3.80	1.90	0.80	14	13.40	11.50	10.40
03	4.60	2.70	1.60	16	15.00	13.10	12.00
04	5.40	3.50	2.40	18	16.60	14.70	13.60
05	6.20	4.30	3.20	20	18.20	16.30	15.20
06	7.00	5.10	4.00				
07	7.80	5.90	4.80				
08	8.60	6.70	5.60				
09	9.40	7.50	6.40				
10	10.20	8.30	7.20				
11	11.00	9.10	8.00				
12	11.80	9.90	8.80				

SPECIFICATIONS

- 1.Current rating : 0.3A AC , DC
- 2.Voltage rating : 30V AC , DC
- 3.Temperature rating : -25°C ~ +85°C

Material:

- 1.Housing : LCP
- 2.Contact : PhosphorBronze,Gold Plated over all Nickel
- 3.Peg : Brass, Gold Plated over all Nickel



TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
04/22/24
DATE
04/22/24
DATE
04/22/24

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	WAFER 0.8mm . SMT 90 度
SCALE	DWG NO.	WF-0801RSxx-S149
SHEET NO.	PART NO.	WF-0801RSxx-S149

SIZE
A4
VER
R3